

CASTEX

CAS

EACH MODEL NUMBER CONSISTS OF THE FOLLOWING:
 SERIES / OPERATION / LUMENS / WATTAGE / VOLTAGE / WET
 LOCATION / WEIGHT / DIMENSION

SERIES:	CAS
OPERATION:	HT (AC ONLY), 0-10V DIMMING
LUMENS:	LO (3,132), MO (11,702), HO (21,313)
WATTAGE:	30W/100W/180W
VOLTAGE:	120-277V
WET LOCATION:	IP67
WEIGHT:	LO: 8.8 LBS, MO/HO: 16.5 LBS
DIMENSION:	LO: 7.9 X 7.9 X 8.0" MO: 9.9 X 11.8 X 11.8" HO: 9.8 X 15.7 X 15.8"



IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

1. Do not let power cords touch hot surfaces.
2. Do not mount near gas or electric heaters.
3. Equipment should be mounted in locations and at heights where unauthorized personnel will not readily subject it to tampering.
4. The use of accessory equipment not recommended by BeLuce Canada Inc., may cause an unsafe condition, and will void the warranty.
5. Do not use this equipment for other than its intended purpose.
6. Servicing of this equipment should be performed by qualified service personnel.

SAVE THESE INSTRUCTIONS!

CAUTION ! ALWAYS MAKE SURE THE POWER IS TURNED OFF before starting the installation


Wiring fixture to power supply, shall be performed by a certified electrician, and wired in a manner that complies with all local and national electrical codes, as well as the manufacturer's wiring diagram.

WARNING


No user serviceable parts. Refer service to a qualified service technician. Read instructions prior to installing and/or operating this device. Installation should be performed by a licensed electrician/installer in accordance with local codes.

Dimensions


CASLO

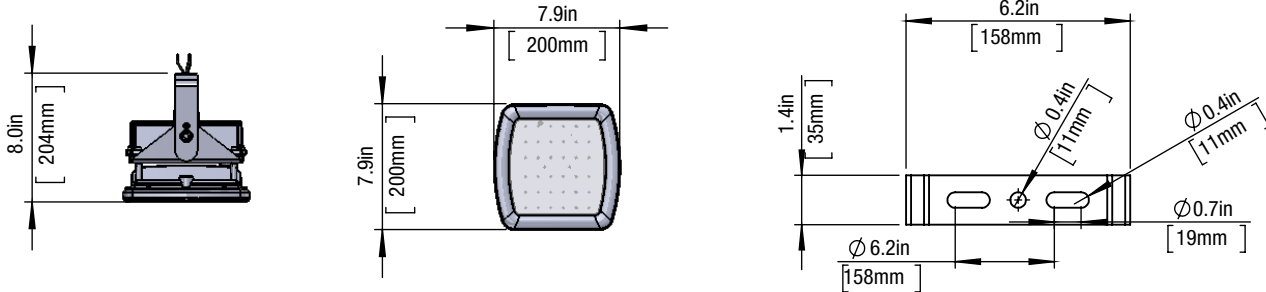


CASMO

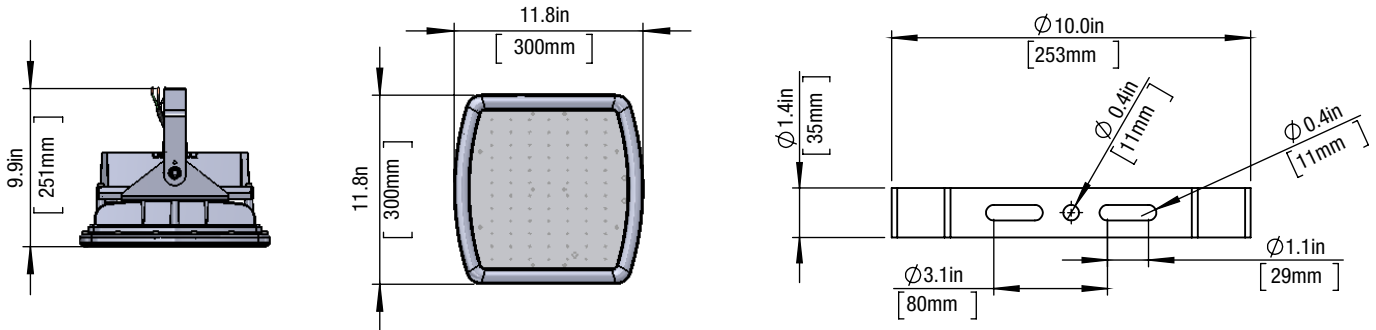

CASHO

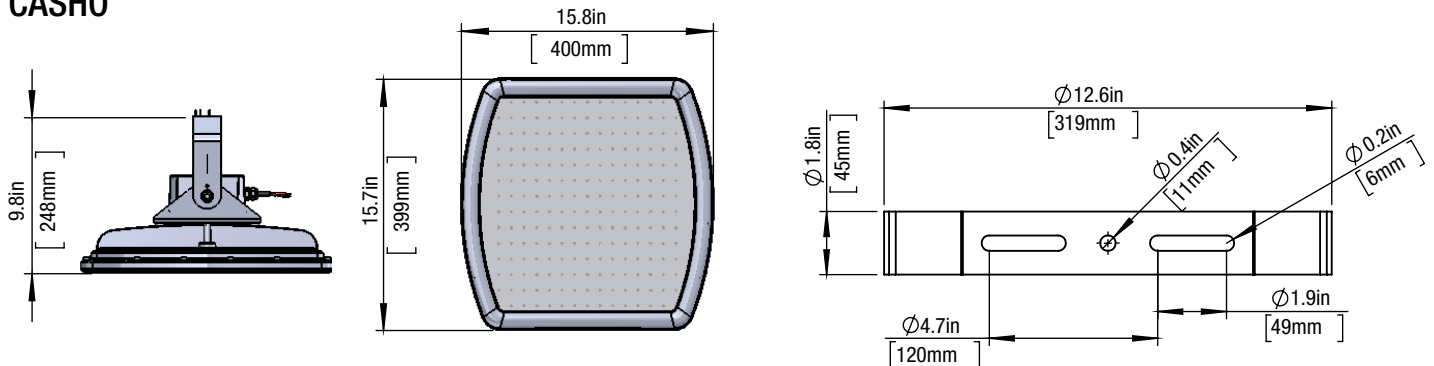

0-10V dimming wires must be run from a different conduit out of the J-Box.

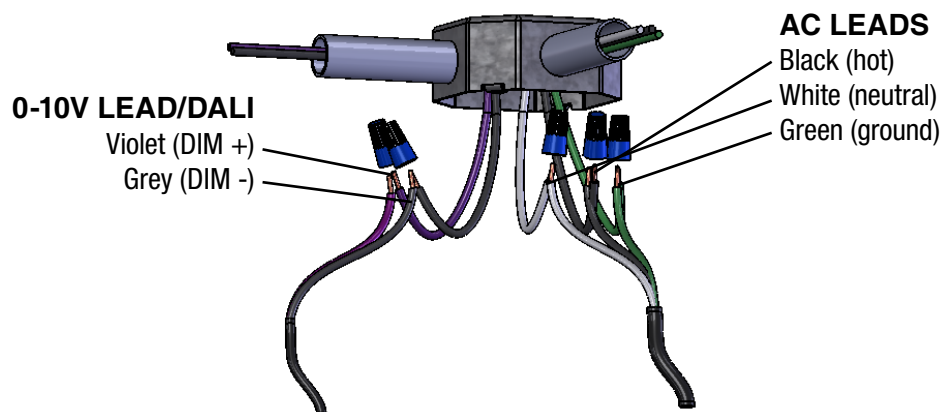


Note: For non-dimming, 3-conductor cord is available (upon request).

926000299

Surface Bracket

1. Attach fixture to ceiling as shown (ensure screws are being screwed into the re-enforced beam).
2. Wire the fixture to AC power.
3. Remove small screws to adjust the angle, and re-install to secure in place (22.5° increments on both side).

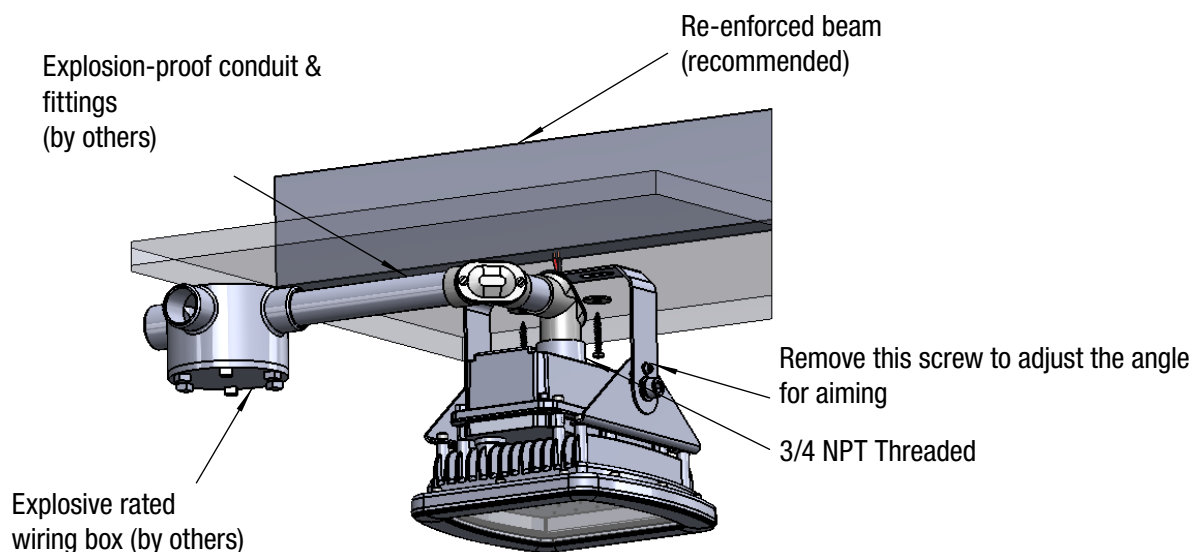

Pendant Kit

1. Remove surface mount bracket ("must").
2. Feed the cords through the stem.
3. Screw the stem on the fixture & canopy.
4. Connect AC wiring to j-box.
5. Secure the canopy to ceiling.

CANOPY

