



# AQUA EXIT OR SORTIE COMBO

Weatherproof Combo

Project Name: \_\_\_\_\_ Model Number: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_


## FEATURES & BENEFITS

- NEMA 4X SEA MR16 heads are standard
- Durable and corrosion-resistant fiberglass
- Heater available for cold environments
- Fully gasketed NEMA 4X housing
- Temperature Range: +10 to +40°C. With heater option added: -20 to +40°C
- CSA 22.2 No. 141-15 Performance Certified

## EXTERNAL SPECIFICATIONS

The AQUA housing is constructed from durable, corrosion resistant fiberglass. The NEMA 4X housing is fully gasketed for wet location applications and is supplied standard in a grey finish. Four polycarbonate pressure screws firmly hold the polycarbonate lens in place. Wall, ceiling or end mounting configurations are available (ceiling and end mount versions come complete with a factory installed weatherproof steel canopy). Single or double face versions must be specified. Removable universal chevrons are standard on each unit.

## DIMENSIONS

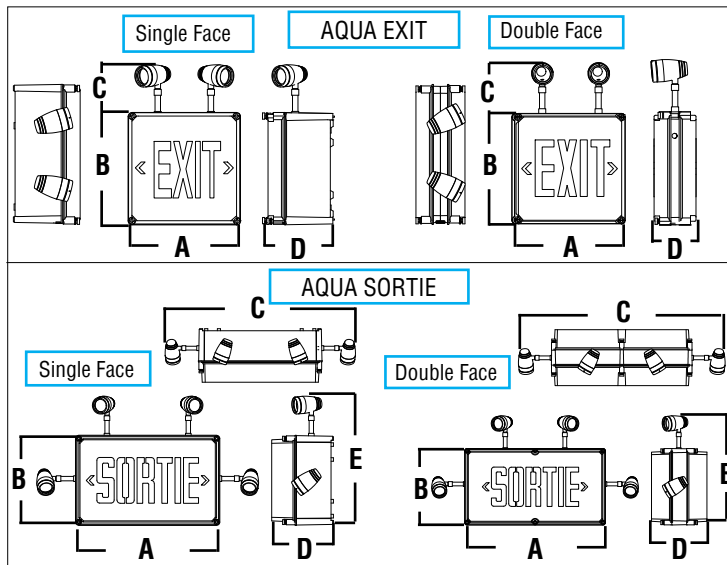

AQUA EXIT	A	B	C	D
Single Face	298mm (11 3/4")	298mm (11 3/4")	133mm (5 1/2")	178mm (6 7/8")
Double Face	298mm (11 3/4")	292mm (11 1/2")	140mm (5 1/2")	127mm (5")

AQUA SORTIE	A	B	C	D	E
Single Face	498mm (19 1/4")	305mm (12")	749mm (29 1/2")	210mm (8 1/4")	432mm (17")
Double Face	552mm (21 3/4")	298mm (11 3/4")	813mm (32")	216mm (8 1/2")	140mm (16 3/4")

## BATTERY TECHNOLOGY

The AQUA is designed with a maintenance free, valve regulated sealed lead-acid battery providing emergency lighting duration as specified. Recharge time of the battery is 24 hours.

## LAMP SELECTION

	6V	12V	24V
Composite Tungsten	7.2, 9W	9, 12, 18W	9, 18W
Quartz (Q)	12W	12, 20 (55W PAR36 only)	N/A
LED-MR16	5, 7W	2, 5, 7W	5, 7W
MR16 <sup>1</sup>	N/A	50W	N/A
TESTA <sup>2</sup>	N/A	5, 9, 14, 30W	5, 9, 14, 30W
Sealed Beam LED (PAR36 Only)	N/A	6W	6W

<sup>1</sup>MR16 not available in SR head; <sup>2</sup>12-24V.

## MODEL RATING GUIDE

MODEL	VOLTAGE (OUTPUT)	WATTAGE RATING 30MIN
AQ 6-36	6	36
AQ 6-50	6	50
AQ 6-80	6	80
AQ 12-36	12	36
AQ 12-50	12	50
AQ 12-72	12	72
AQ 12-90	12	90
*AQ 12-120	12	120
*AQ 12-150	12	150
*AQ 24-144	24	144

\* Single face only

## ORDERING GUIDE

SERIES	CAPACITY	LIGHT SOURCE	LETTER COLOUR	FACE#	CHEVRONS	MOUNTING	HEADS	OPTIONS
AQ-E (Exit) AQ-S (Sortie)	See model rating guide	L (LED)	R (Red)	1 (Single) 2 (Double)	U (Field adjustable)	W (Wall mount no canopy) C (Ceiling mount factory installed) E (End mount factory installed)	0 (None) 1SEA (one MR16 head) 2SEA (two MR16 heads) 1TESSQ (One head, HO) 2TESSQ (Two heads, HO) 1LRWP (One head) 2LRWP (Two heads)	<sup>2</sup> TD (10 min. time delay) WG (Wireguard) SW (Special wording-specify) <sup>2</sup> IH (Internal heater) SM (Side mount heads) AT (Auto-test) PK (Pendant kit) <sup>3</sup> 2CK (Dual circuit) UDC (6V-24VDC)

NOTES: <sup>1</sup>Mounting must be specified; <sup>2</sup>AC Voltage must be specified; <sup>3</sup>With 120VAC only