



BOLLA WP UNIT

Compact NEMA 4X Die-cast Aluminum Battery Unit

Project Name: _____ Model Number: _____
Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Die-cast aluminum housing
- 6V 36W or 12V 60W
- Vandal resistant design
- Performance optics allows greater spacing on unit
- Clear polycarbonate lens
- Gasket with memory retention
- Tamper proof screws included
- Designed to withstand the elements and abuse in applications such as schools, corridors, institutions and apartment complexes
- Suitable for surface wall/ceiling, wet location/NEMA 4X installations
- CSA C22.2 No. 141-15 Performance Certified


BATTERY TECHNOLOGY

Designed with either a maintenance free, sealed valve regulated lead acid battery or a Ni-MH battery that provides a minimum emergency duration of 30 minutes. Recharge time of the battery is less than twenty-four [24] hours. The maximum battery operating temperature is +40°C and the minimum is +10°C.

BELUCE AUTO-TEST (AT)

The BeLuce auto-test system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability.

DIMENSIONS

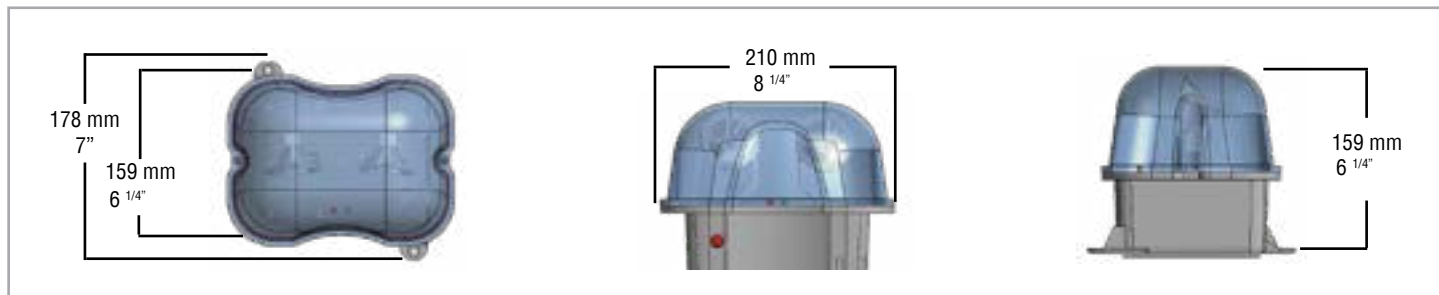

ORDERING GUIDE

BOL-WP - - - -

SERIES	CAPACITY	LAMP #	LAMP TYPE	OPTIONS
BOL-WP	6V36W (6VDC, 36W) (Lead-acid) 12V60W (12VDC, 60W) (Ni-MH)	1 (Single lamp) 2 (Double lamp)	See lamp selection	AT (Auto-test) WG (Wireguard) CC (Custom colour housing) LC (Line cord) TLP (Twist lock plug)

LAMP SELECTION

	6V	12V
MR16	N/A	50W*
LED	5, 7W	2, 5, 7W

*single lamp only

MODEL RATING GUIDE

MODEL	VOLTAGE (OUTPUT)	VOLTAGE 30MIN	VOLTAGE 90MIN
BOL-6-36	6	36	12
BOL-12-60	12	60	28