













BRAVADO HZ REMOTE


Die-cast Aluminum Remote

Project Name:	Model Number:
Prepared By:	Date:

FEATURES & BENEFITS

- → Die-cast aluminum housing
- Vandal resistant
- → 6, 12, or 24V/DC
- → Class 1, Division 2, Groups A-D
- → Class 2, Division 1, 2; Groups E-G
- → T coded T4A
- Performance optics allows up to 70 foot spacing on center
- → Clear polycarbonate lens
- Zinc bushing
- → Suitable for NEMA 4X and IP66 installations
- Applications: schools, public areas, institutions, apartment complexes
- → CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

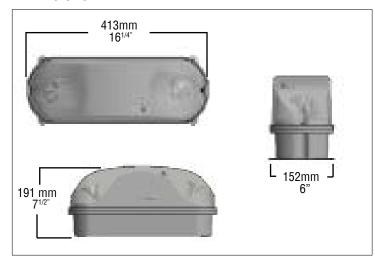

ORDERING GUIDE

BRV-HZ-R - -

SERIES	OPERATION	LAMP TYPE	OPTIONS
BRV-HZ-R	6 (Volt DC) 12 (Volt DC) 24 (Volt DC)	See Lamp Selection	CC (Custom colour mounting plate) WG (Wireguard)

LAMP SELECTION	6V	12V	24V
LED-MR16	5, 7W	2, 5, 7W	5, 7W

TEMPERATURE CODES

TEMPERATU	RE CODES CLASS I, DIV. 2, GROUPS E,F,G		
Lamp	7 Watt LED max		
T Code	T4A		
TEMPERATURE CODES CLASS 2, DIV. 1 & 2, GROUPS E,F,G			
Lamp	7 Watt LED max		
T Code	T4A		

