

BS100LX

INDUSTRIAL

Type: _____

Project: _____

Delivered Lumens:
9834 lm - 11989 lm

Input Wattage:
80W - 100W

Efficacy:
Up to 136 lm/W

Colour Temperatures:
3000K, 3500K, 4000K, 5000K

Projected Lumen Maintenance:
L₈₅ @ >54,000 hrs.

The **BS100LX** features eight (8) closure clips that securely and evenly seal the luminaire



The UV stabilized polycarbonate diffuser eliminates glare and is integrated with crystals that assist in the enhancement of even light distribution

Unique three piece design that allows effortless assembly without any tools

The polycarbonate **BS100LX** is corrosion, flame and vandal resistant

The **BS100LX** is ideal for installation in parking garages, warehouses, breezeways, canopies, schools and much more.

Configurations

MODEL	LENGTH	OPERATION	POWER	COLOUR TEMP	INPUT	MOUNTING	OPTIONS
BS100LX	4 (4ft)	[BLANK] (AC only)	L (10488 lm)	¹ 3K (3000K)	S (120-277V)	[BLANK] (surface mount - std.)	SS (stainless steel clips)
			H (11989 lm)	35K (3500K)	C (347V)	[BLANK] (chain hang kit - std.)	⁸ IOS02 (microwave, internal, step-dimming, 120-347V (26' MH)
				4K (4000K)		² AC (aviation cable)	EOS03 (end mount 120-277V step dimming IP66)
				5K (5000K)		³ SPK (single pendant kit)	EOS04 (end mount 347V step dimming IP66)
						⁵ DPK (double pendant kit)	EOS05 (end mount 120-347V on/off sensor)
						⁴ JM (direct mount to J-box)	EOS09 (end mount on/off 120-277V)
						MM (magnetic mount)	LOS03 (integral lens mount 120-277V step dimming IP66 on sensor)
						PM (pivot mount)	LOS04 (integral lens mount 347V step dimming IP66 on sensor)
							¹ LC (Line Cord)
							⁶ CT (Cabtire cord)
				TLP (Twist lock plug)			
				¹ FP (fuse protection)			
				¹ EM (90 min emergency backup remote driver)			
				⁴ TP (4 tamper proof screws)			
				SP (10kA surge protection)			
				¹ BLK (Black housing)			
				90 (90+ CRI)			
				T 50°C High Temperature			

NOTE¹: EM, LC and FP are not available in 347V; **NOTE²:** longer lead time, contact factory; **NOTE³:** specify length for AC: 50", 72", 150", 250" fully adjustable; **NOTE⁴:** SPK min 6"; **NOTE⁵:** Voids IP66 rating; **NOTE⁶:** DPK 12" minimum-8' maximum, 12" increments only; **NOTE⁷:** must specify length: 6ft or 10ft; **NOTE⁸:** refer to Energy Chart for all LM output; **NOTE⁹:** Microwave occupancy sensor.

BS100LX

Compatible Sensor Table

ORDERING GUIDE	BRAND	MODEL
EOS03	Acuity	SBOR-6-OEX-D
EOS04	Acuity	SBOR-6-OEX-D-HVOLT
EOS05	Wattstopper	HBP-112-L7-EM1-OEM
EOS06	Wattstopper	FSP-221B-D-L7-W
LOS03	Wattstopper	FSP-212-L7
LOS04	Wattstopper	FSP-221-L7

Compatible sensors can be ordered as options but will be shipped separately. Sensor brand is manufacturer's choice unless otherwise noted. If a compatible brand / type sensor is required please call for price.

DLC ID Table

MODEL	DLC ID	MODEL	DLC ID
BS100LX-4H3K	PU1VWJJ5	BS100LX-4H5K	P0W5UVI5
BS100LX-4H3K-T	PB5554UO	BS100LX-4H5K-T	PLEVSMQW
BS100LX-4H35K	P9XBKRKK	BS100LX-4L3K	POMEYUNK
BS100LX-4H35K-T	P1O8QGN9	BS100LX-4L35K	PP6NM3C0
BS100LX-4H4K	PC4IFBUB	BS100LX-4L4K	P2TDDSVT
BS100LX-4H4K-T	P6NKVAYN	BS100LX-4L5K	PZ1UCCME

BS100LX Accessories

MODEL	DESCRIPTION
50001053	² aviation cable 50"
50001054	² aviation cable 72"
50001055	² aviation cable 100"
50001056	² aviation cable 150"
AC250	² aviation cable 250"
50001041	¹ single pendant kit 12"
50001042	¹ single pendant kit 18"
50001043	¹ single pendant kit 24"
50001044	¹ single pendant kit 36"
50001045	¹ single pendant kit 48"
DPK12	double pendant kit 12"
DPK24	double pendant kit 24"
DPK36	double pendant kit 36"
DPK48	double pendant kit 48"
DPK96	double pendant kit 96"
50001030	pivot mounting
JM	junction box mount
50001024	magnetic mounting

NOTE¹: PK, options, min 6"

NOTE²: specify length for AC: 50", 72", 150", 250" fully adjustable

HOUSING:

100% UV stabilized polycarbonate, liquid silicone perimeter gasket with memory retention.

DIFFUSER:

Frosted UV stabilized polycarbonate diffuser, eliminates glare and provides even distribution.

REFLECTOR:

Flat, steel reflector system finished in durable white powder coat. The reflector system holds all electrical components.

ELECTRICAL:

Available in 3000K, 3500K, 4000K or 5000K colour temperatures. High efficiency driver operates 120V through 277V or 347V, 50-60HZ. L85 greater than 54,000 hours. SDCM 3.

AC POWER CONNECTION:

3-wire, 18awg, pre-stripped 12" leads for quick in-field connection and hot load disconnect feature.

WEIGHT:

10 lbs. / 4.5 kilo.

MOUNTING:

Surface & chain mount configuration is standard with integrated stainless steel mounting brackets and chain hooks. Additional mounting systems are available: including aviation cable, pendants, magnetic, pivot and direct to junction box configurations.

DIMMING:

0 - 10V dimming down to 1% is standard.

EMERGENCY BACKUP (EM):

Remote mounted emergency backup with Ni-Cd batteries provides 2634 lumens for 90 minutes.

OPERATING TEMPERATURE:

AC only: -40°C to 40°C

AC only (T): -40°C to 50°C

EM: 0°C to 50°C



SANITATION LISTED:

Equivalent to the NSF standard 2 and is suitable for use in food equipment environments.

WARRANTY:

5 year LED warranty, see website for full warranty details.


Dimensions

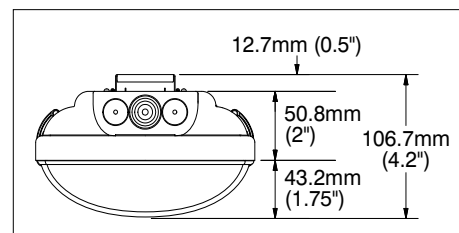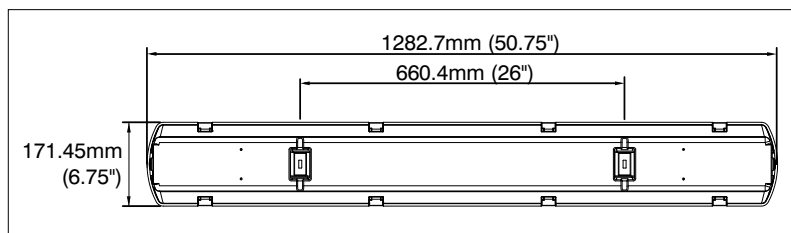

BS100LX

BS100LX-4H-5K

Luminous Intensity Distribution

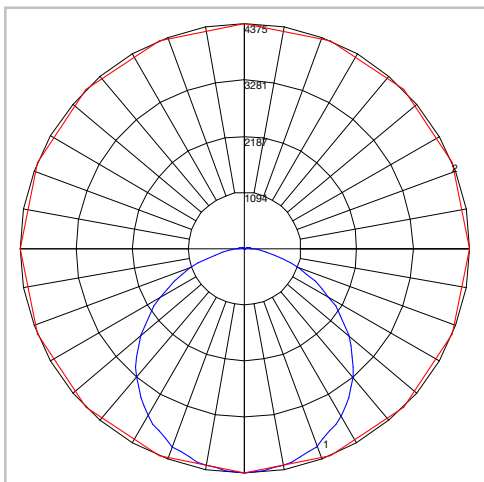

Zonal Lumen Summary

ZONE	LUMENS	% LUMINAIRE
0-30	3304	28%
10-90	11388	95%
60-80	2121	18%
90-180	196	1%
0-180	11993	100%

Energy Chart

MODEL	LENGTH	COLOUR	EFFICACY	WATTAGE	LUMEN OUTPUT	CRI	REPORTED L85 (HOURS) ¹
BS100LX-4L-3K	4ft	3000K	127 lm/W	80	9834	80+	>54,000
BS100LX-4L-35K	4ft	3500K	131 lm/W	80	10141	80+	>54,000
BS100LX-4L-4K	4ft	4000K	134 lm/W	80	10359	80+	>54,000
BS100LX-4L-5K	4ft	5000K	136 lm/W	80	10488	80+	>54,000
BS100LX-4H-3K-T	4ft	3000K	118 lm/W	100	11241	80+	>54,000
BS100LX-4H-35K-T	4ft	3500K	121 lm/W	100	11592	80+	>54,000
BS100LX-4H-4K-T	4ft	4000K	124 lm/W	100	11842	80+	>54,000
BS100LX-4H-5K-T	4ft	5000K	125 lm/W	100	11989	80+	>54,000
BS100LX-4H-3K	4ft	3000K	121 lm/W	100	11241	80+	>54,000
BS100LX-4H-35K	4ft	3500K	125 lm/W	100	11592	80+	>54,000
BS100LX-4H-4K	4ft	4000K	128 lm/W	100	11842	80+	>54,000
BS100LX-4H-5K	4ft	5000K	130 lm/W	100	11989	80+	>54,000

NOTES: Actual performance may vary between +/-5% of initial lumen output **NOTE¹:** Calculated as per TM-21-11. Limited by 6X LM80 test duration.