



CURVA RM

Surface / Recessed Edge-Lit Running Man




Brushed Aluminum

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Surface wall, ceiling or end mounting
- Edge-Lit LED technology
- White aluminum housing is standard
- Self-powered models provide 120 minute run time
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

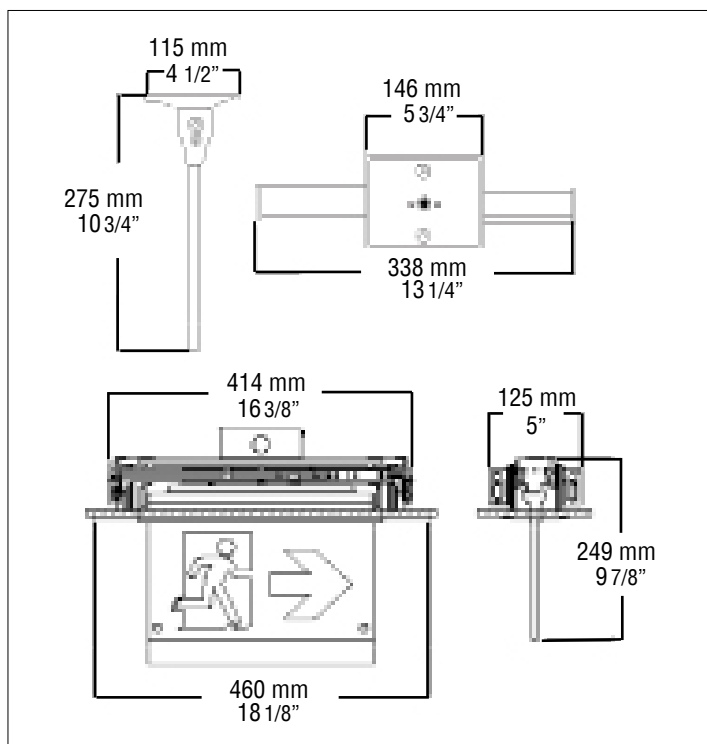

EXTERNAL SPECIFICATIONS

The CURVA RM is designed with a minimalist-inspired aluminum housing that is offered standard in white. The high clarity acrylic panel is standard in a universal face with universal pictograms. The housing rotates from 0° to 180° for precise positioning. An external LED status indicator and test switch is standard on all self-powered models. 120-347V is standard.

INTERNAL SPECIFICATIONS

AC ONLY, and SELF-POWERED: standard 120-347VAC input, Self-powered versions use sealed nickel-cadmium batteries to provide a minimum 120 minutes of emergency duration. Electronic cut-off circuit prevents over-discharge. CURVA signs configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC.

BATTERY TECHNOLOGY

The CURVA is designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 120 minutes. Recharge time of the battery is 24 hours.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



ORDERING GUIDE

CRV-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	FACE#	MOUNTING	PICTOGRAM	OPTIONS
CRV-RM	Blank (AC only) SP (Self-powered)	L (LED)	U (Universal)	S (Universal surface wall, ceiling or end mount) RC (Recessed Ceiling)	OLR (Universal pictograms)	WG (Wireguard) UDC (6 - 24VDC) BA (Brushed aluminum housing, black end caps)

NOTE: 50001063 (white recessed mount kit); 50001077 (brushed aluminum recessed mount kit)



CURVA RM

Surface / Recessed Edge-Lit Running Man



Brushed Aluminum

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
19011006	CRV-RM-L-U-S-0LR	CURVA EDGE-LIT R/M AC ONLY CLEAR LED UNIVERSAL SURFACE MOUNT WHITE FINISH 120347V INPUT
19011057	CRV-RM-L-U-S-0LR-UDC	CURVA EDGE-LIT R/M CLEAR LED UNIVERSAL SURFACE MOUNT WHITE FINISH 120347V INPUT-UDC
19011007	CRV-RM-SP-L-U-S-0LR	CURVA EDGE-LIT R/M S/P CLEAR LED UNIVERSAL SURFACE MOUNT WHITE FINISH 120347V INPUT 120MIN