



# ECCO LUNA LED

Wet Location Polycarbonate Battery Unit

Project Name: \_\_\_\_\_

Model Number: \_\_\_\_\_

Prepared By: \_\_\_\_\_

Date: \_\_\_\_\_

## FEATURES & BENEFITS

- 5W LED lamps, 932lm total, 5000K CCT
- 120/277/347VAC voltage input with current limit protection
- UV stabilized diffuser
- Fully enclosed lamps eliminate unwanted tampering/repositioning
- Vandal resistant latch clips
- Wet location due to advanced liquid silicon gasketing
- Meets all food equipment NSF/ANSI 2 standards
- Available in a remote version
- Optional custom colour (CC) finishes
- CSA C22.2 No. 141-15 Performance Certified


## BATTERY & CIRCUIT TECHNOLOGY

The unit uses an internal sealed lead acid battery that provides a minimum 90 minutes emergency duration. The automatic recharge circuit is regulated by an electronic volt sensor and the battery is protected by a low-voltage cut-off circuit. An input voltage of 120/277/347VAC can be field selected during installation. The maximum battery operating temperature is +40°C and the minimum is +10°C.

## BELUCE AUTO-TEST (AT)

The BeLuce auto-test system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability. The **ECCO LUNA** Auto-Test option includes an automatic 10 minute time delay function to allow for HID lighting to “warm up”.

## DIMENSIONS

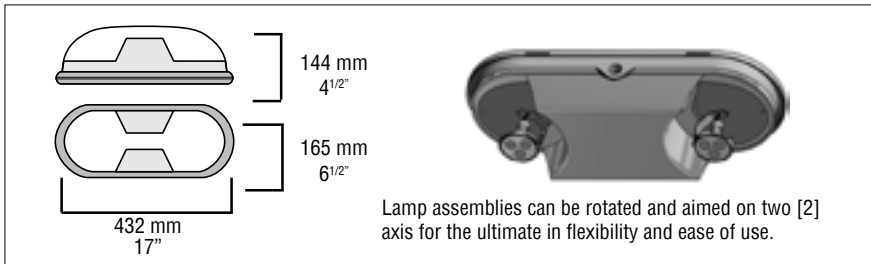

The ECCO LUNA series can be ordered in optional custom colour (CC) finishes.

## ORDERING GUIDE

COLA - - -

SERIES	CAPACITY	LAMPS	INPUT VOLTAGE	OPTIONS
COLA	10W (90 minutes)	205LED (2 x 5W LED MR16)	G (120/277/347V) A (120V)	<sup>1</sup> AT (Auto-test) <sup>1</sup> 120SP (120 min emergency) LC (Line cord, 120V only) BLK (Black housing) CC (Custom colour) <sup>2</sup> WG (Wireguard)

NOTE: <sup>1</sup>EM and ACEM only. <sup>2</sup>Use accessory # 50001110.

## PHOTOMETRICS

