



QUADRA COMBO RM


Extruded Aluminum Running Man Combo

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall or ceiling mounting
- Up to 55W lamps
- High-output LED technology
- Up to 6V-50W or 12V-72W capacity
- Extruded aluminum housing
- LED standard 120/347V input
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

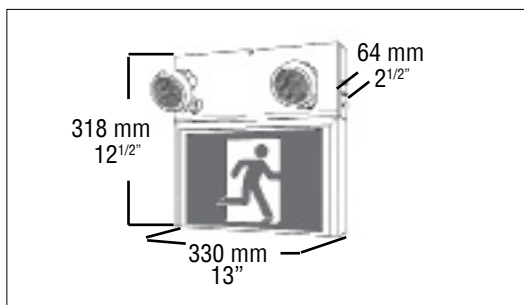

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

MODEL RATING GUIDE

| MODEL | VOLTAGE (OUTPUT) | WATTAGE RATING 30MIN | WATTAGE RATING 120MIN |
|-------------|------------------|----------------------|-----------------------|
| QR-RM-6-36 | 6 | 36 | 10 |
| QR-RM-6-50 | 6 | 50 | 15 |
| QR-RM-12-36 | 12 | 36 | 10 |
| QR-RM-12-72 | 12 | 72 | 22 |

EXTERNAL SPECIFICATIONS

The QUADRA Combination series are constructed from durable extruded aluminum. The QUADRA Combination comes standard with a white baked powder coat finish. Available in custom epoxybased powder coat finishes (please specify). Universal mounting pattern and key hole slots are stamped into the backplate. Standard external LED status indicators and push button test switch. Heads are molded from high impact thermoplastic in a matching colour; SR PAR18 standard.

INTERNAL SPECIFICATIONS

SELF-POWERED: Standard versions use a valve regulated, sealed lead-acid battery to provide the emergency lighting duration as specified per unit. LED standard 120/347V input. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

Designed with a maintenance free, valve regulated sealed lead-acid battery providing emergency lighting duration as specified per unit. Recharge time of the battery is 24 hours.

SUPPLEMENTAL TEXT

A running man sign with supplementary "EXIT" or "SORTIE" text is also available in the QUADRA model. To designate "EXIT" add "-E" to the end of the pictogram nomenclature, for "SORTIE" add "-S". For example, a sign with supplementary "EXIT" text and the indicator down to the right would have "DR-E" as it's pictogram nomenclature.

LAMP SELECTION

| | 6V | 12V |
|------------------------------|---------|-------------------------|
| Composite Tungsten | 7.2, 9W | 9, 12, 18W |
| Quartz (Q) | 12W | 12, 20 (55W PAR36 only) |
| LED-MR16 | 5, 7W | 2, 5, 7W |
| MR16* | N/A | 50W |
| LED Module (array) | 3, 4W | 3, 4W |
| Sealed beam LED (PAR36 only) | N/A | 6W |

* MR16 not available in SR head

ORDERING GUIDE

QR-RM- - - - - - - - - -

| SERIES | WATTS | LIGHT SOURCE | FACE# | ³ PICTOGRAM | MOUNTING | HEADS | LAMP | AC VOLTAGE | OPTIONS |
|--------|--------------------------------|--------------|---|--|--|---|--------------------|----------------------------|--|
| QR-RM | 6-36 6-50 12-36 12-72 | L (LED) | 1 (Single) 2 (Double) U (Universal) | OLR (Universal pictograms) O (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left) | W (Wall) M (Universal) C (ceiling) | 0 (None) 1SR (One head) 2SR (Two heads) 1LR (One head) 2LR (Two heads) 1BTMR (One head) 2BTMR (Two heads) | See lamp selection | 120/347V 120V 347VAC | CC (Custom colour - specify) 4TD (Time delay-specify 5, 10, 20min) 5WG (Wireguard) 6PK12 (12" pendant kit) AT (Auto-test) SM (Side mount heads) TP (Tamper proof screws) |

NOTE: ¹Two pictograms or OLR must be ordered - specify; ²Specify OLR pictogram; ³For a pictogram and supplementary "EXIT" or "SORTIE" text add "-E" or "-S" after the pictogram nomenclature, size becomes 26" long; ⁴120V, 347V only, 10min is default; ⁵Use wire guard accessory #50001110 & 5000119; ⁶Universal & ceiling mount only.