



ESCO EXIT


Thermoplastic Exit

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- Field removable chevrons
- High-output LED technology
- Thermoplastic housing
- Attractive low profile design
- Temperature Rating: +10 to +40°C
- AC only and UDC Signs: -20 to +40°C
- Self Powered Sign: +10 to +40°C. With heater option: -20 to +40°C
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

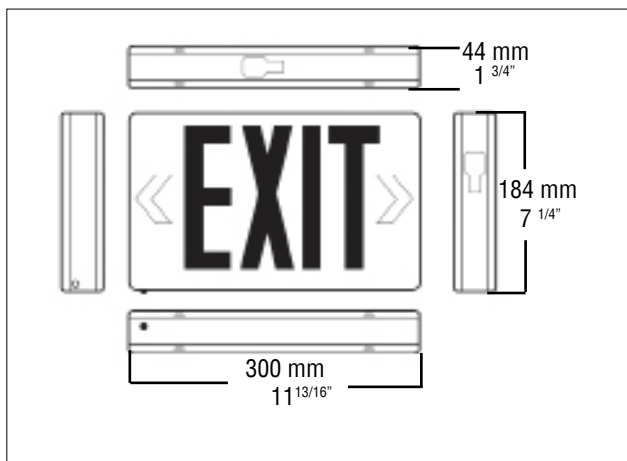

EXTERNAL SPECIFICATIONS

The ESCO is constructed from durable corrosion and flame resistant thermoplastic. The ESCO comes standard with a mounting canopy, two stencils, one backplate, removable chevrons and all mounting hardware. The unit comes standard finished in white. A damp location rating is standard on all ESCO series products. An external LED status indicator and test switch is standard on all self-powered models.

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED: standard 120/347VAC input, Self-powered versions use sealed nickel-cadmium batteries to provide a minimum 90 minutes of emergency duration. Electronic cut-off circuit prevents over-discharge. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

Designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

ORDERING GUIDE

EC-E (Exit) - - - - -

SERIES	OPERATION	LIGHT SOURCE	LETTER COLOUR	FACE#	MOUNTING	INPUT VOLTAGE	OPTIONS
EC-E (Exit)	Blank (AC only) SP (Self-powered)	L (LED)	R (Red)	U (Universal)	¹ M (Universal mount)	120/347V	UDC (Universal 6, 12, 24VDC) BLK (Black Housing)

NOTE: ¹Not suitable for pendant mount

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
19000068	ECELRUM-UDC 120/347V	ESCO THERMOPLASTIC EXIT SIGN RED LED UNIVERSAL DC & 120347V INPUT UNIVERSAL FACE & MOUNT
19000132	ECESPLRUM-120347V	ESCO THERMOPLASTIC EXIT SIGN RED LED SELF POWERED UNIVERSAL FACE UNIVERSAL MOUNT WHITE FINISH 120347V INPUT