

EXIT

QUADRA RECESSED


Recessed LED Exit or Sortie

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall mount recessed mounting
- Field removable chevrons
- High-output LED technology
- Extruded aluminum housing
- AC Only, Self-Powered or Universal DC
- 20 gauge steel
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

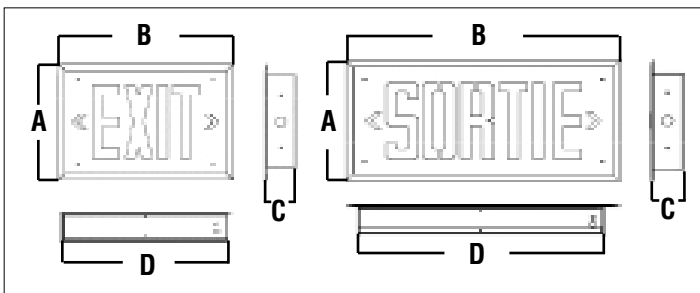

SERIES	A	B	C	D
QRR-E	241mm (9 1/2")	362mm (14 1/4")	57mm (2 1/4")	311mm (12 1/4")
QRR-S	241mm (9 1/2")	495mm (19 1/2")	60mm (2 3/8")	194mm (17 1/2")

EXTERNAL SPECIFICATIONS

The QUADRA RECESSED commercial aluminum face exit signs feature an in-wall installation provide a clean and architecturally pleasing appearance. Ideal for commercial and institutional installations, this recessed fixture blends perfectly with current interior decors. QUADRA RECESSED exits configured for AC/DC operation feature a universal DC input; 6VDC - 24VDC backup voltages are standard. The QUADRA RECESSED is available configured with high-output LEDs in AC only, AC/DC and self-powered operation versions.

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED: comes standard configured with high-output LED technology and 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

The QUADRA-RECESSED is designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

BELUCE AUTO-TEST (AT)

The BeLuce auto-test system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability, as required by the fire code.

ORDERING GUIDE

SERIES	OPERATION	LIGHT SOURCE	LETTER COLOUR	FACE#	MOUNTING	VOLTAGE	OPTIONS
QRR-E (Exit) QRR-S (Sortie)	Blank (AC only) SP (Self-powered)	L (LED)	R (Red)	1 (Single)	W (recessed wall mount)	³ 120/347VAC 120/277VAC ² 120VAC	CC (Custom colour - specify) BA (Brushed aluminum finish) TP (Tamper proof screw) SW (Special wording - specify) WG (Wireguard) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) ¹ AT (Auto-test, SP only) ² 120VDC (Specify 2 or 4 wires)

NOTE: White components default. ¹Only available with QRR-E; ²With 120VDC only and only available with QRR-E; ³Voltage for QRR-S