



RSE

Recessed Steel Battery Unit

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- High-efficiency two stage charger
- 20 gauge steel cabinet
- 6V and 12V up to 150W capacity
- Designed to fully recess into a wall or ceiling
- Torsion springs securely hold the cover in place and allow for easy maintenance
- SR PAR18 style heads are standard
- Configured with universal 120/277/347VAC input
- CSA 22.2 141-15 Performance Certified


BATTERY TECHNOLOGY

The unit is designed with a maintenance free, sealed valve regulated lead acid battery or a Ni-MH battery that provides a minimum emergency duration of 30 minutes. Recharge time of the battery is less than 24 hours. The maximum battery operating temperature is +40°C and the minimum is +10°C.

BELUCE AUTO-TEST (AT)

The BeLuce auto-test system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability.

DIMENSIONS

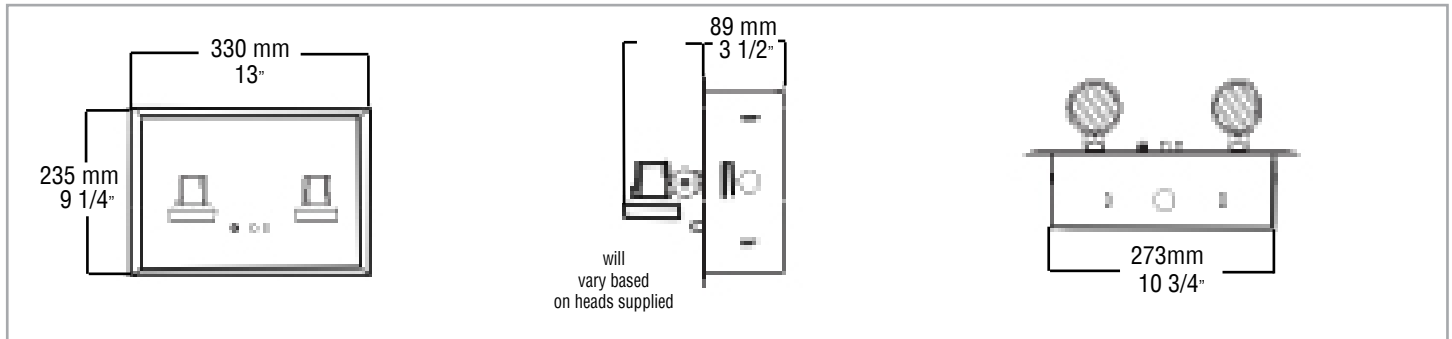

ORDERING GUIDE

RSE - - - - -

SERIES	OPERATION	CAPACITY	HEADS	LAMPS	VOLTAGE	OPTIONS
RSE	6 (Volt DC) 12 (Volt DC)	See model rating guide	0 (None) 1SR (PAR18, 1 head) 2SR (PAR18, 2 heads) 3SR (PAR18, 3 heads) 1BTMR (MR16, 1 head) 2BTMR (MR16, 2 heads) 1LR (PAR36, 1 head) 2LR (PAR36, 2 heads)	See lamp guide	120/277/347V	NC (Ni-Cd batteries, see guide) AT (Auto-test) ¹ TD (Time delay - specify 5, 10, 20 mins) CC (Custom colour) TC (Teflon coated lens) BZ (Emergency buzzer) ADA (Audible alarm - failure indication) ² FAI (Fire alarm interface - specify type) ¹ RFS (Radio frequency suppression) IRT (Infra-red remote test) HHC (Hand held controller) TP (Tamper proof screw) A (Ammeter) V (Voltmeter)

NOTE: ¹AC voltage must be specified ²Specify open/closed/6-24 VAC



RSE

Recessed Steel Battery Unit

LAMP SELECTION (SEALED BEAM ONLY IN LR PAR36 STYLE HEAD)

	6V	12V
Composite Tungsten	7.2, 9W	9, 12, 18W
Quartz (Q)	12W	12, 20 (55W, PAR36 only)
MR16 (BTMR)	N/A	20, 35, 50W
LED-MR16 (SR or BTMR)	5, 7W	2, 5, 7W
LED Module	3, 4W	3, 4W

MODEL RATING GUIDE

MODEL	VOLTAGE (INPUT)	30MIN	WATTAGE 90MIN	120MIN
RSE-6-36	6	36	12	10
RSE-6-50	6	50	18	15
RSE-6-50-NC	6	50	22	18
RSE-6-80	6	80	27	24
RSE-6-90	6	90	36	27
RSE-6-100-NC	6	100	42	35
RSE-12-72	12	72	27	22
RSE-12-90	12	90	36	27
RSE-12-100-NC	12	100	45	35
RSE-12-120	12	120	65	36
RSE-12-150	12	150	65	45