



FORTE RM


Vandal Resistant Running Man

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- AC Only, Self-Powered or Universal DC
- Tamper proof screws for added protection
- Durable 16 gauge steel housing (14 ga. optional)
- Vandal resistant polycarbonate faceplate
- Surface wall, ceiling or end mounting
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

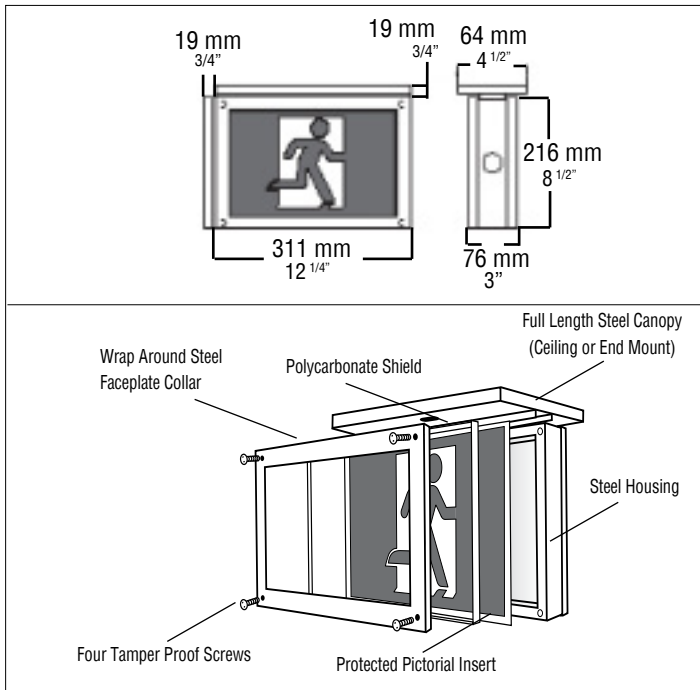

EXTERNAL SPECIFICATIONS

The FORTE is constructed from heavy duty steel. Sign face(s) are 16 gauge steel wrap-around collars backed with impact resistant polycarbonate. Tamper resistant screws are standard. The FORTE comes standard with a white baked powder coat finish. Available in custom epoxy-based powder coat finishes (please specify). Single or double face versions must be specified. The self-powered version comes standard with an external LED status indicator and test switch. The faceplate is backed with the polycarbonate plate.

INTERNAL SPECIFICATIONS

AC ONLY: Standard 120/347VAC input
SELF-POWERED: Standard self-powered versions use sealed nickel-cadmium batteries to provide a minimum 90 minutes of emergency duration. Solid state charger and transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

The FORTE-SP is designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



ORDERING GUIDE

FR-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	FACE#	PICTOGRAM	² MOUNTING	OPTIONS
FR-RM	Blank (AC only) SP (Self-powered)	L (LED)	1 (Single) ¹ 2 (Double)	OLR (Universal pictograms) 0 (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall mount no canopy) C (Ceiling mount factory installed) E (End mount factory installed)	AT (Auto-test, SP only) UDC (Universal 6 - 24VDC) 14G (14 gauge steel frame)

NOTE: ¹Two pictograms or OLR must be ordered - specify; ²Mounting must be specified the FORTE is not a universal product.