



FORTEZZA™ COMBO RM


Wet Location IP66 & Vandal Resistant Running Man

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- UV resistant polycarbonate faceplate
- Vandal resistant to withstand extreme abuse
- Heavy gauge die-cast aluminum housing, black is standard
- MR16 halogen or LED lamps, up to 50W
- AC only and UDC Signs: -20 to +40°C
- Self-powered Sign: +10 to +40°C
- Low temperature -40°C / Internal heater -20°C
- Salt Spray Passed
- 120/277/347VAC input
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

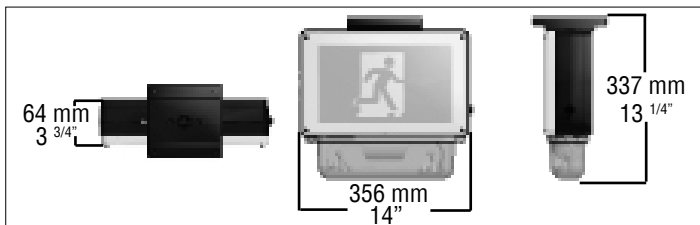

MODEL RATING GUIDE

VOLTAGE (OUTPUT)	WATTAGE RATING
6	36
12	20
12	40
12	72
12	100

LAMP SELECTION

	6V	12V
MR16	N/A	50W
MR16 LED	5, 7W	2, 5, 7W

ORDERING GUIDE

FTZ-C-RM - - - - -

SERIES	WATTS	LED	FACE#	PICTOGRAM	MOUNTING	LAMP	AC VOLTAGE	OPTIONS
FTZ-C-RM	See Model Rating Guide	L (LED)	¹ (Single)	OLR (Universal pictograms) 0 (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	² W (Wall) ¹ U (Universal)	See Lamp Selection	120/277/347V 120V	AT (Auto-test) BB (Black body, standard) WW (White body) PK (Pendant kit) ¹ IH (Internal heater -20°C) ¹ LT (Low temperature -40°C)

NOTE: ¹6V36W or 12V72W w/120VAC only; ²Single face only.

EXTERNAL SPECIFICATIONS

The FORTEZZA™ is constructed from .420" thick, heavy duty cast aluminum. The pictorial insert is protected by high abuse clear polycarbonate, which is recessed into the housing. Tamper resistant screws are standard and ensure the integrity of the unit. The FORTEZZA™ comes standard in black, other colour options available upon request. The FORTEZZA™ comes standard with an external LED status indicator and test switch. The lamp housing is constructed from a vandal-resistant polycarbonate for maximum durability.

INTERNAL SPECIFICATIONS

Standard versions use nickel-cadmium or nickel-metal hydride batteries to provide a minimum of 30 minutes of emergency duration. Two stage charger and transfer are standard.

BELUCE AUTO-TEST (AT)

The BeLuce auto-test system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability.

BATTERY TECHNOLOGY

Designed with nickel-cadmium or nickel-metal hydride batteries providing a minimum emergency duration of 30 minutes. Recharge time of the battery is 24 hours.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

