



# FORTEZZA™ EXIT PLUS

Low Profile Wet Location IP66 & Vandal Resistant

Project Name: \_\_\_\_\_

Model Number: \_\_\_\_\_


Prepared By: \_\_\_\_\_

Date: \_\_\_\_\_

## FEATURES & BENEFITS

- AC Only, Self-Powered or Universal DC
- UV resistant polycarbonate faceplate
- Vandal resistant to withstand extreme abuse
- Heavy gauge die-cast aluminum housing
- Surface wall, ceiling or end mounting
- AC only and UDC Signs: -20 to +40°C
- Self-powered Sign: +10 to +40°C (With heater option added: -20°C and low temperature option -40°C)
- Salt Spray Passed
- CSA 22.2 No. 141-15 Performance Certified

## DIMENSIONS

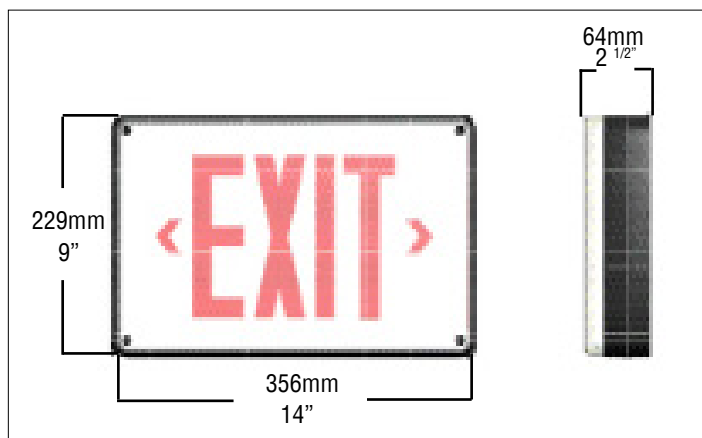

## EXTERNAL SPECIFICATIONS

The FORTEZZA™ PLUS is constructed from .420" thick, heavy duty cast aluminum. The faceplates are protected by high abuse clear polycarbonate, which is recessed into the housing. Tamper resistant screws are standard. The FORTEZZA™ PLUS comes standard black. Single or double face versions must be specified. The self-powered version comes standard with an external LED status indicator and test switch.

## INTERNAL SPECIFICATIONS

AC ONLY: STANDARD 120/347VAC or 120/277VAC input. SELF-POWERED: standard self powered versions use sealed nickel-cadmium batteries to provide a minimum of 90 minutes of emergency duration. Optional 120 minute duration batteries are available. An internal heater with thermostat is optional for low temperature installations. Solid state charger and transfer are standard. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

## BATTERY TECHNOLOGY

The FORTEZZA™ series is designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 90 minutes. Optional 120 minute nickel-cadmium batteries are available. Recharge time of the battery is 24 hours.

## ORDERING GUIDE

FTZ - - - - -

SERIES	MODEL	LED	FACE#	MOUNTING	STYLE	VOLTAGE	OPTIONS
FTZ	HT (AC only) SP (Self-powered)	LR (Red) <sup>5</sup> LG (Green)	1 (Single) 2 (Double)	U (Universal mount - std.)	Plus	120/347V 120/277V	BB (Black face, black body) WW (White face, white body) AT (Auto-test, SP only) <sup>2</sup> IH (Internal heater 120, 277 or 347V) <sup>1</sup> LT (Low temp -40°C, 120V only) <sup>1</sup> FL (Flashing alarm) SW (Special wording - specify) PK (Pendant Kit) 120SP (120 minute emergency) <sup>3</sup> 2CK (Dual circuit) UDC (6 - 24VDC) <sup>4</sup> FAI (Flash on fire alarm signal) <sup>3</sup> 120VDC (Specify 2 or 4 wires)

NOTES: <sup>1</sup>Available for SP models only; <sup>2</sup>IH specify wall or ceiling mount, no universal or end mount; <sup>3</sup>With 120VAC only; <sup>4</sup>Specify open/closed/6-24 VAC; <sup>5</sup>Can only be used with special wording signage.