



FORTEZZA™ PLUS RM

Wet Location IP66, NEMA 4X Vandal Resistant Running Man

Project Name: _____

Model Number: _____


Prepared By: _____

Date: _____

FEATURES & BENEFITS

- Slim profile with heavy gauge die-cast aluminum housing
- AC Only, Self-Powered or Universal DC
- Vandal resistant to with stand extreme abuse
- UV resistant polycarbonate faceplate
- Surface wall, ceiling or end mounting
- AC only and UDC Signs: -20 to +40°C
- Self-powered Sign: +10 to +40°C (With heater option added: -20°C and low temperature option -40°C)
- Salt Spray Passed
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

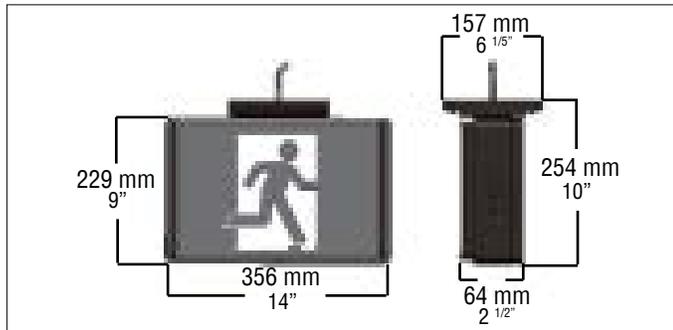

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



ORDERING GUIDE

FTZ-RM - - - - -

SERIES	OPERATION	LED	FACE#	PICTOGRAM	MOUNTING	VOLTAGE	STYLE	OPTIONS
FTZ-RM	HT (AC only) SP(Self-powered)	L (LED)	1 (Single) U (Universal)	OLR (Universal pictograms) O (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	⁶ U (Universal mount) ⁷ W (Wall - no canopy)	120/347V 120/277V	Plus	BB (Black body) WW (White body) ¹ IH (Internal heater 120, 277 or 347V) ⁵ LT (Low temp -40°C, 120V only) FL (Flashing alarm) PK (Pendant kit) 120SP (120 minute emergency) AT (Auto-test, SP only) ² 2CK (Dual circuit) UDC (6 - 24VDC) ³ FAI (Fire alarm interface) ⁴ 120VDC (Specify 2 or 4 wires)

NOTE: ¹AC voltage must be specified; ²120-277VAC only; ³Specify open/closed and 6/12/24 VDC; ⁴120VAC input only; ⁵Available for SP models only; ⁶Universal mount includes ceiling/end/wall mounting; ⁷Single face only.

