



GUIDA EXIT

Surface/Recessed Edge-Lit Exit (Steel)

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Surface or recessed, wall or ceiling mounting
- White, clear or mirrored face
- Field adjustable chevrons
- AC Only, Self-Powered or Universal DC
- Edge-Lit LED technology
- CSA 22.2 No. 141-15 Performance Certified

EXTERNAL SPECIFICATIONS

The GUIDA housing backbox is constructed from durable 20 gauge steel. The acrylic face plate is available in both single face or double face versions, with a clear, white or mirrored background (please specify). Recessed versions are supplied standard with a white, baked powder coat steel trim plate. Available in custom epoxy-based powder coat finishes or alternate metal finishes (please specify). External LED monitor light and test switch are standard on self-powered versions.


INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology, 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. GUIDA exits configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

Designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

DIMENSIONS

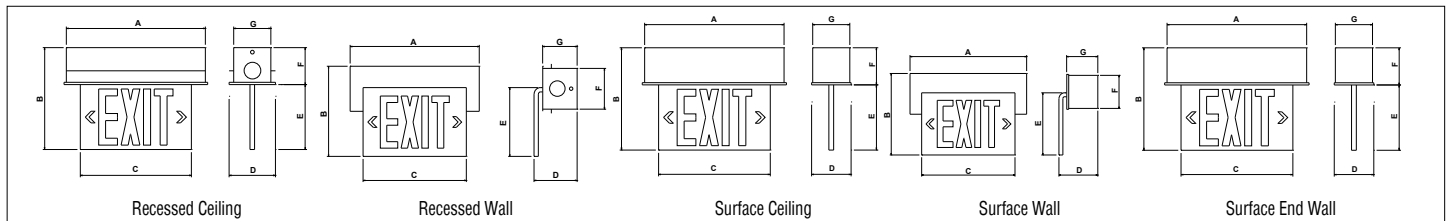

MODEL	A	B	C	D	E	F	G
Rec. Ceiling	14" (356mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4 1/4" (108mm)
Rec. Wall	15" (381mm)	10 1/2" (267mm)	12" (305mm)	6" (152mm)	8" (203mm)	4" (102mm)	4 1/4" (108mm)
Surf. Ceiling	14 1/4" (362mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4 1/4" (108mm)
Surf. Wall	14 1/4" (362mm)	10" (254mm)	12" (305mm)	6" (152mm)	8" (203mm)	4" (102mm)	4 1/4" (108mm)
Surf. End Wall	14 1/4" (362mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4" (102mm)

ORDERING GUIDE

GD-E - - - - -

SERIES	OPERATION	LIGHT SOURCE	MOUNTING	LETTER COLOUR	FACE	CHEVRONS	OPTIONS
GD-E (Exit)	Blank (AC only) SP (Self-powered)	L (LED)	¹ RC (Recessed Ceiling) ² RW (Recessed wall) ³ SC (Surface ceiling) ³ SW (Surface wall) ³ SE (Surface end wall)	ROC (Red on clear - single face only) ROW (Red on white) ROM (Red on mirror)	1 (Single) 2 (Double)	U (Field adjustable)	AT (Auto-test, SP only) CC (Custom colour - specify) BA (Brushed aluminum finish) SW (Special wording - specify) PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) ¹ 120VDC (Specify 2 or 4 wires) IF (Inverted face-mullion mount)

NOTE: ¹With 120VAC only; ² If ordered with BA (brushed aluminum finish) trim plate is constructed in aluminum; ³ If ordered with BA (brushed aluminum finish) both housing and trim plate are constructed in aluminum.