

# GUIDA RM

Surface/Recessed Edge-Lit Running Man



Project Name: \_\_\_\_\_  
Prepared By: \_\_\_\_\_

Model Number: \_\_\_\_\_  
Date: \_\_\_\_\_


## FEATURES & BENEFITS

- Edge-lit LED technology
- Surface or recessed, wall or ceiling mounting, surface end mount
- AC Only, Self-Powered or Universal DC
- CSA 22.2 No. 141-15 Performance Certified

## EXTERNAL SPECIFICATIONS

The GUIDA housing backbox is constructed from durable 20gauge steel. The acrylic face plate is available in both single face or double face versions. Recessed versions are supplied standard with a white, baked powder coat steel trim plate. Available in custom epoxy-based powder coat finishes or alternate metal finishes (please specify). External LED monitor light and test switch are standard on self-powered versions.

## DIMENSIONS

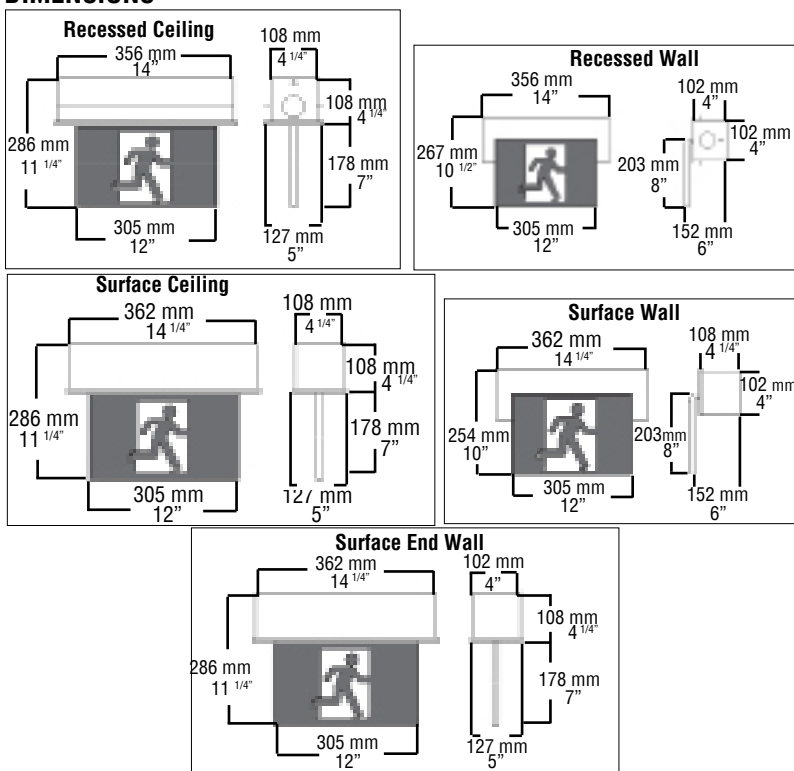

## INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology, 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. GUIDA signs configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC.

## SUPPLEMENTAL TEXT

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology, 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. GUIDA signs configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC.

## UNIVERSAL PICTOGRAMS

The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

## BELUCE AUTO-TEST (AT)

The BeLuce auto-test system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability.

## ELECTRICAL SPECIFICATIONS

If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

## ORDERING GUIDE

GD-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	MOUNTING	FACE#	2 PICTOGRAM	OPTIONS
GD-RM	Blank (AC only) SP (Self-powered)	L (LED)	<sup>4</sup> RC (Recessed ceiling) <sup>5</sup> SC (Surface ceiling) <sup>5</sup> SW (Surface wall) <sup>5</sup> SE (Surface end wall) <sup>4</sup> RW (Recessed wall)	1 (Single) 2 (Double)	OLR (Universal pictograms) 0 (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	CC (custom colour - specify) BLK (black colour) BA (Brushed aluminum finish) PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) AT (Auto-test, SP only) <sup>3</sup> 120VDC (Specify 2 or 4 wires) MM (Mullion mount) IF (Inverted face)

NOTE: 50001094 (RC-RW LBBX) <sup>1</sup>Two pictograms or OLR must be ordered - specify; <sup>2</sup>For a pictogram and "EXIT" or "SORTIE" text add "-E" or "-S" after the pictogram nomenclature; <sup>3</sup>With 120VAC only; <sup>4</sup>If ordered with BA (brushed aluminum finish) trim plate is constructed in aluminum; <sup>5</sup>If ordered with BA (brushed aluminum finish) both housing and trim plate are constructed in aluminum.