



GUIDA SORTIE

Surface/Recessed Edge-Lit Sortie (Steel)

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Edge-Lit LED technology
- White, clear or mirrored face
- Field adjustable chevrons
- Surface or recessed, wall or ceiling mounting
- AC Only, Self-Powered or Universal DC
- CSA 22.2 No. 141-15 Performance Certified

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology, 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. GUIDA SORTIE signs are configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.


EXTERNAL SPECIFICATIONS

The GUIDA SORTIE housing backbox is constructed from durable 20 gauge steel. The acrylic faceplate is available in both single face or double face versions, with a clear, white or mirrored background (please specify). Recessed versions are supplied standard with a white baked powder coat steel trimplate. Available in custom epoxy-based powder coat finishes or alternate metal finishes (please specify). External LED monitor light and test switch are standard on self-powered versions.

BATTERY TECHNOLOGY

Designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

DIMENSIONS

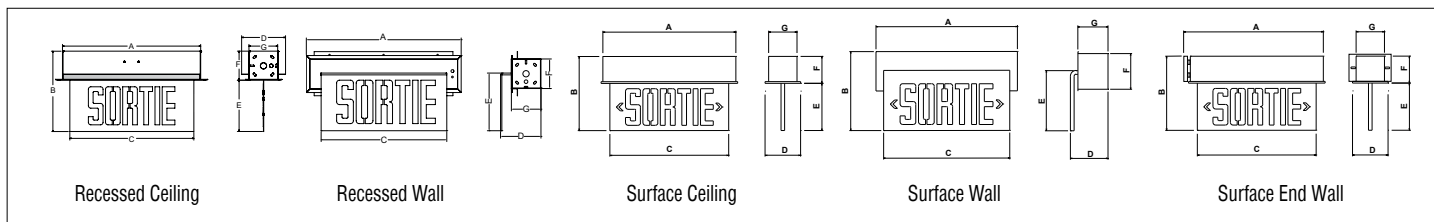

MODEL	A	B	C	D	E	F	G
Rec. Ceiling	19 1/2" (495mm)	11 1/4" (286mm)	17 1/2" (445mm)	5" (127mm)	7 1/4" (184mm)	4" (102mm)	4" (102mm)
Rec. Wall	21 1/2" (546mm)	10" (254mm)	17 1/2" (445mm)	5 1/2" (140mm)	8" (203mm)	4" (102mm)	4" (102mm)
Surf. Ceiling	19 1/2" (495mm)	11 1/4" (286mm)	17 1/2" (445mm)	4 1/4" (108mm)	7 1/4" (184mm)	4" (102mm)	4" (102mm)
Surf. Wall	19 1/2" (495mm)	10" (254mm)	17 1/2" (445mm)	5 1/2" (140mm)	8" (203mm)	4" (102mm)	4" (102mm)
Surf. End Wall	19 1/2" (495mm)	11 1/4" (286mm)	17 1/2" (445mm)	4 1/4" (108mm)	7 1/4" (184mm)	4" (102mm)	4" (102mm)

ORDERING GUIDE

GD-S - - - - -

SERIES	OPERATION	LIGHT SOURCE	MOUNTING	LETTER COLOUR	FACE	CHEVRONS	OPTIONS
GD-S (Sortie)	Blank (AC only) SP (Self-powered)	L (LED)	1RC (Recessed Ceiling) 1RW (Recessed wall) 2SC (Surface ceiling) 2SW (Surface wall) 2SE (Surface end wall)	ROC (Red on clear - single face only) ROW (Red on white) ROM (Red on mirror)	1 (Single) 2 (Double)	U(Field adjustable)	CC (Custom colour - specify) BA (Brushed aluminum finish) SW (Special wording - specify) PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) IF (Inverted face-mullion mount)

NOTE 1: If ordered with BA (brushed aluminum finish) trim plate is constructed in aluminum; 2: If ordered with BA (brushed aluminum finish) both housing and trim plate are constructed in aluminum.