

INTERNO BASSO LED

Low Level Retracted Recessed

Project Name: _____ Model Number: _____
Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Designed for optimum corridor illumination
- Up to 50' spacing on centre
- Installed at 18" above the floor level
- Lamps retract when not in Emergency mode
- Textured white powder coat finish can be painted to match any déco
- Self-diagnostics are standard
- Configured with field selectable 120 or 277 VAC 60 Hz input
- Suitable for wall mount, compact 3" deep recessed housing
- CSA 22.2 No. 141-15 Performance Certified


LED TECHNOLOGY

Comes standard with concealed LEDs totalling 11W. The LEDs provide 311 absolute lumens providing up to 50' spacing on center over a 4' path of egress. Precise LED optics and fixed mirror arrangement ensures optimal light distribution without requirement for user field adjustment.

BATTERY TECHNOLOGY

Designed with a maintenance free, sealed valve regulated lead calcium battery that provides a minimum emergency duration of 120 minutes. Integral battery maintenance discharge for NiCad batteries. The maximum battery operating temperature is +40°C and the minimum is +10°C.



DIMENSIONS

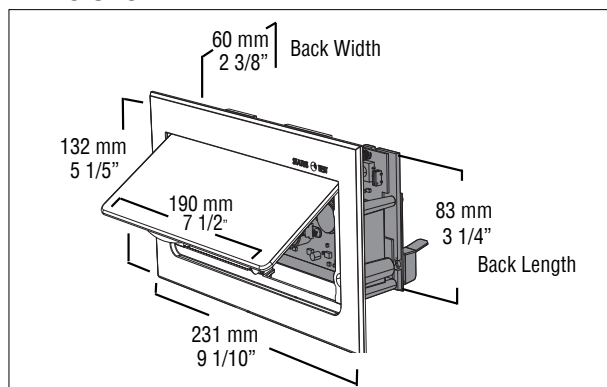

ORDERING GUIDE

INT-B

SERIES	BATTERY	OPTIONS
INT-B	LC (Sealed lead calcium) NC (nickel-cadmium)	P (Pre-shipped back box) TD (Time delay - 15 mins) CC (Custom Colour) IRT (Infra-red remote)

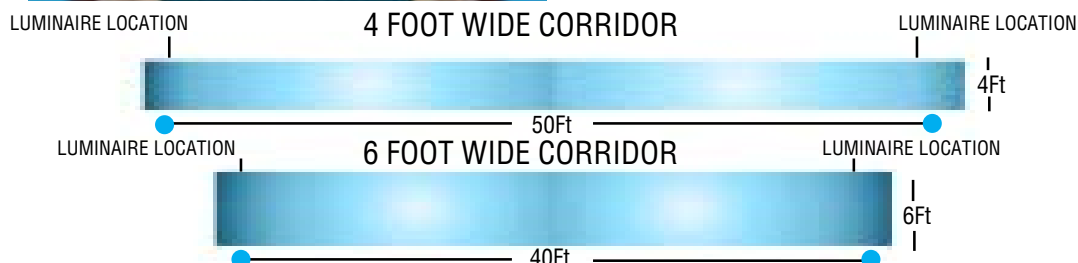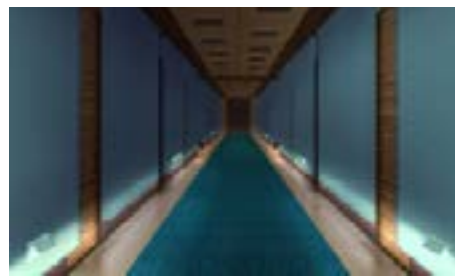

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
19000907	INT-B-LC	INTERNO INT-B-LC