



MICRA RM


One Piece Extruded Aluminum Running Man

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- Ultra thin one-piece body
- High-output LED technology
- Extruded aluminum housing
- AC Only or Universal DC
- 16 gauge steel
- Housing end plates are machined from solid aluminum and secured to the housing with two 2 recessed screws
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

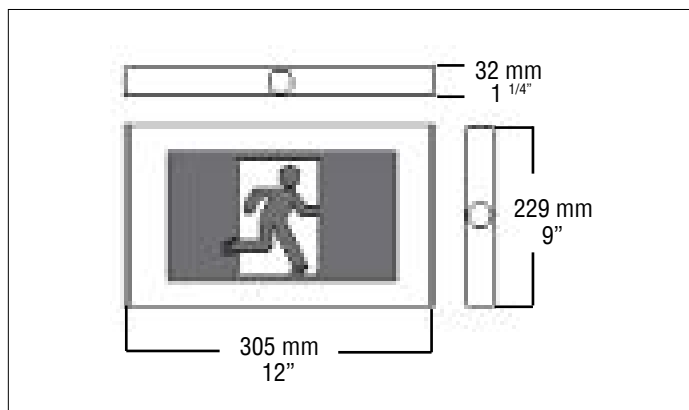

BATTERY TECHNOLOGY

The MICRA-SP is designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. Recharge time of the battery is 24 hours.

EXTERNAL SPECIFICATIONS

The MICRA is configured with high-output LED lamps. Standard with 120/347VAC input. All LED versions consume only 2W nominal power. Optional emergency illumination is provided by the LED light source at the following wattages. 6VDC - 24VDC, 2 watts

INTERNAL SPECIFICATIONS

AC ONLY & AC/DC comes standard configured with high-output LED technology, 120/347VAC input.

UNIVERSAL PICTOGRAMS

The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



ORDERING GUIDE

MC-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	FACE#	PICTOGRAM	² MOUNTING	OPTIONS
MC-RM	Blank (AC only)	L (LED)	1 (Single) 2 (Double)	OLR (Universal pictograms) 0 (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall - no canopy) C (Ceiling) E (End)	CC (custom colour - specify) BA (Brushed aluminum body) TP (Tamper proof screw) PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) ³ 120VDC (Specify 2 or 4 wires) SW-OL (RM no indicator, left) 90SP (90 minute emergency) 120SP (120 minute emergency)

NOTE: For self-powered, consult factory. ¹Two pictograms or OLR must be ordered - specify; ²Mounting must be specified. Canopy is installed on the sign during manufacture and is not field adjustable; ³With 120VAC only



MICRA RM

One Piece Extruded Aluminum Running Man

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
10600241	MC-RML1-OLR-W-120347V-UDC	MICRA ULTRA THIN EXTRUDED ALUMINUM RUNNING MAN WHITE LED UNIVERSAL DC SINGLE FACE UNIVERSAL PICTOGRAMS WALL MOUNT WHITE FINISH 120347V INPUT
10600242	MC-RML2-OLR-C-120347V-UDC	MICRA ULTRA THIN EXTRUDED ALUMINUM RUNNING MAN WHITE LED UNIVERSAL DC DOUBLE FACE UNIVERSAL PICTOGRAMS CEILING MOUNT WHITE FINISH 120347V INPUT