

SPA

VANDAL RESISTANT LINEAR LED

Type: _____

Project: _____

Delivered Lumens:

4600 lm

Input Wattage:

40W

Efficacy:

Up to 150 lm/W


Colour Temperatures:

4000K

Projected Lumen Maintenance:

L₇₀ @ 78,000 hrs.

Full-length aluminum housing for excellent thermal management

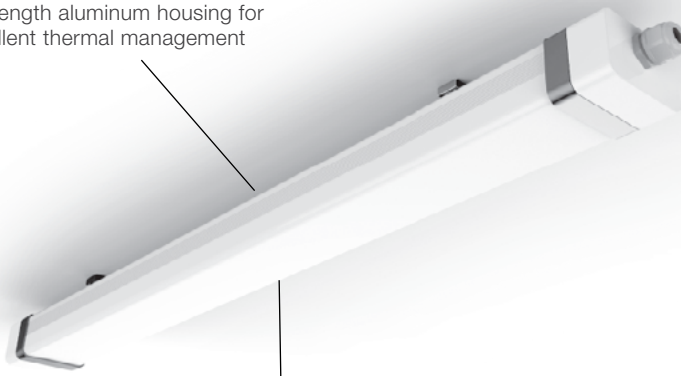

Diffuser provides maximum efficiency with minimum glare

The **SPADA®** is vandal resistant, waterproof, dust tight and corrosion resistant

Surface or suspension mount is standard

IK10 rated strength

The vandal resistant design of the **SPADA®** makes it ideal for transit, stairwells, work stations, locker rooms, schools, breezeways, public areas and manufacturing facilities.

Configurations

MODEL	LENGTH	OPERATION	POWER	COLOUR TEMP	INPUT
SPA	4 (4ft)	HT (AC only)	40W (4ft)	WT40 (4000K)	120-277V


Spada accessories

ORDER CODE	DESCRIPTION
50001053	aviation cable 50"
50001054	aviation cable 72"
50001055	aviation cable 100"
50001056	aviation cable 150"
AC250	aviation cable 250"
CH	chain hang kit (Not Including Chain)

Pre-Built Inventory

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
19010860	SPA-4-HT-40W-WT40-120-277V	SPADA LED LUMINAIRE 4 FOOT 40W 4000K GREY BAND 1-10V DIMMABLE WITH TERMINAL BLOCK 120-277V INPUT

Dimensions

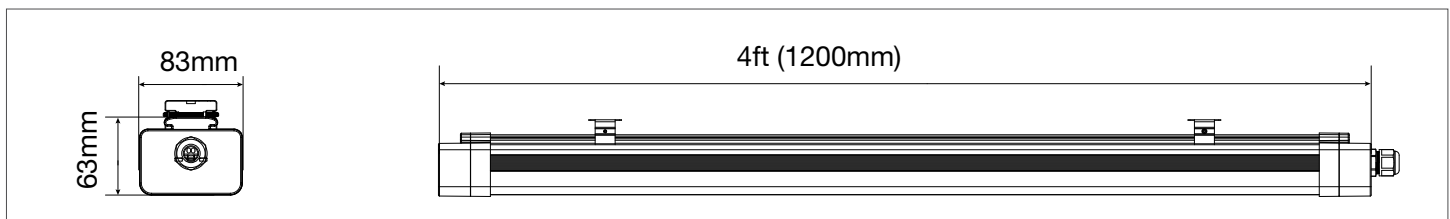

MODEL	A	B	C
SPA-4	1200mm (47.2")	83mm (3.3")	63mm (2.5")

HOUSING:

Die-cast aluminum housing painted white with UV stabilized polycarbonate lens and end caps. End caps are secured with tamper resistant screws. Perimeter gasket for IP65 ingress protection against dust and moisture.

ELECTRICAL:

Available in 4000K, consult factory for other colour temperatures. High efficiency driver operates 100V through 277V, 50-60HZ. A screw-less terminal block is located inside the end cap. Drivers used: 40W. L70 at 78,000 hours. Line cord not included.

OPERATING TEMPERATURE:

-20°C to 40°C

MOUNTING:

Surface mount configuration is standard with integrated stainless steel mounting brackets. Other mounting options available include aviation cable (AC), chain hang (CH) and double pendant. Suspension height is to be specified when ordering any aircraft units.

WEIGHT:

7 lbs. / 2.8 kg.

DIMMING:

1-10V dimming to 10% is standard.

SANITATION LISTED (SL):


Equivalent to the NSF standard 2. The SPADA® is ideal for use in food service equipment environments.

WARRANTY:

5 year LED warranty, see website for full warranty details.

SPA-4-HT-40W-WT40-120-277V

Luminous Intensity Distribution

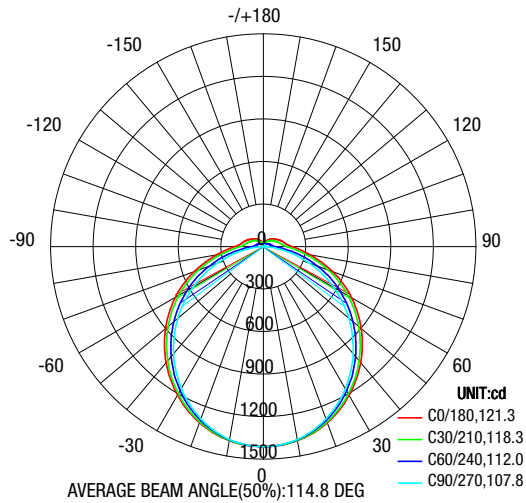**Zonal Lumen Summary**

ZONE	LUMENS	% LUMINAIRE
0-20	515	11.1
0-40	1789	38.4
0-60	3189	68.4
0-90	4280	91.8
90-180	380	8.2
0-180	4660	100.00

CBCP (cd):	1441	CIE Class:	Direct
Efficiency Total:	100%	Lumen Rating:	4660
Efficacy Total:	50 lm/W	Input Wattage:	40W

Energy Chart

MODEL	LENGTH	EFFICACY	WATTAGE	LUMEN OUTPUT	CRI	*L70 HOURS
SPA-4-HT-40W-WT40-120-277V	4ft	150 lm/W	40	4660	80+	78,000

*Projected