



# OVVIO COMBO RM

## 10" NON-RATED Steel Running Man Combo

Project Name: \_\_\_\_\_

Model Number: \_\_\_\_\_


Prepared By: \_\_\_\_\_

Date: \_\_\_\_\_

## FEATURES & BENEFITS

- 10"height pictogram for great visibility
- Durable 18-gauge steel housing in white powered coat finish
- 120/347VAC Input field selectable, or 277VAC
- 1.8 W power consumption for LED exit portion of combination sign
- LED Emergency DC wattages as follows: 6 & 12VDC = 0.9W
- Wattage capacities from 36W, 50W
- 30 minutes emergency power duration standard with sealed lead acid battery
- Momentary push button test switch
- Pilot LEDs for AC, ON and CHARGE
- Fully automatic, current limited charger
- Brownout and short circuit protection
- Temperature compensated
- Slide out faceplates and backplates for rapid and simple installation
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Multiple conduit entry knockouts
- CSA Certified to C22.2 #141

## DIMENSIONS

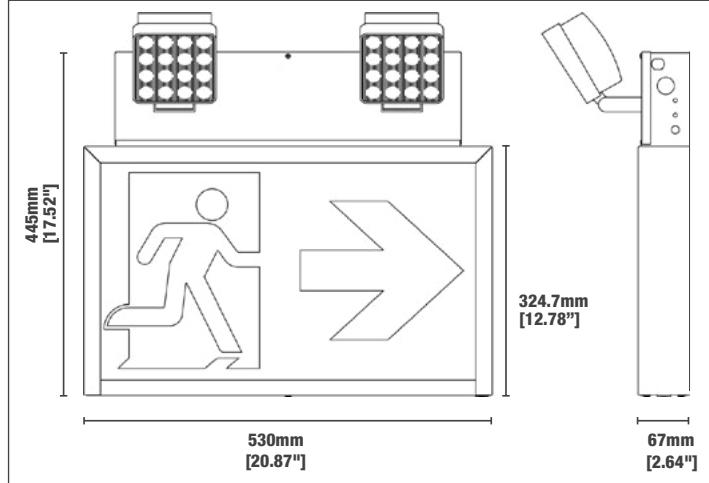

## UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator. Comes standard with three pictogram legends for direction selection.



## MODEL RATING GUIDE

MODEL	OUTPUT (V)	30 MIN	60MIN	90MIN	120MIN
OVV-RM-6-36	6	36	18	12	9
OVV-RM-6-50	6	50	25	16	12
OVV-RM-12-36	12	36	18	12	9
OVV-RM-12-50	12	50	25	16	12

## LAMP SELECTION

LAMP SELECTION	6W	12W
LED MODULE (PAR 18)	3W, 4W, 5W	3W, 4W, 5W, 6W, 7W
LED-MR16	4W, 5W	4W, 5W, 6W, 7W
Testa	N/A	5W, 9W, 14W

## ORDERING GUIDE

Series	Watts	Light Source	Face #	PICTOGRAM	Mounting	Heads	Lamp	AC Voltage	Option
OVV-RM	6-36 6-50 12-36 12-50	L (LED)	U (Universal faces)	0LR (Universal pictograms) 0 (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	M (Universal mount)	0 (None) 1SR (PAR18 MR16, one head) 2SR (PAR18 MR16, two heads) 1BTMR (MR16, one head) 2BTMR (MR16, two heads) 1TESSQ (Industrial, One head) 2TESSQ (Industrial, Two heads)	See lamp selection	120/347V 277V	AT (Auto Test)



# OVVIO COMBO RM

10" NON-RATED Steel Running Man Combo

## PRE-BUILT INVENTORY

ORDERING CODE #	SHORT DESCRIPTION	LONG DESCRIPTION
19000073	OVV-RM-636-L-U-OLR-M-2SR-5WLED-120-347V	OVVIO 10" RUNNING MAN COMBO STEEL SERIES WHITE LED 6V 36W UNIVERSAL FACE/PICTOGRAM/ MOUNT 2 PAR18 5W LED LAMPS WHITE FINISH 120-347V INPUT
19000074	OVV-RM-636-L-U-OLR-M-2SR-5WLED-120-347V-AT	OVVIO 10" RUNNING MAN COMBO STEEL SERIES WHITE LED 6V 36W UNIVERSAL FACE/PICTOGRAM/ MOUNT 2 PAR18 5W LED LAMPS WHITE FINISH 120-347V INPUT C/W AUTO TEST
19000075	OVV-RM-1236-L-U-OLR-M-2TESSQ14WLED-120-347V	OVVIO 10" RUNNING MAN COMBO STEEL SERIES WHITE LED 12V 36W UNIVERSAL FACE/PICTOGRAM/ MOUNT 2 TESTA SQUARE 14W LED LAMPS WHITE FINISH 120-347V INPUT
19000076	OVV-RM-1236-L-U-OLR-M-2TESSQ14WLED-120-347V-AT	OVVIO 10" RUNNING MAN COMBO STEEL SERIES WHITE LED 12V 36W UNIVERSAL FACE/PICTOGRAM/ MOUNT 2 TESTA SQUARE 14W LED LAMPS WHITE FINISH 120-347V INPUT C/W AUTO TEST

## FIBERS

ORDERING CODE	DESCRIPTION
FIBER-G-B-0	RUNNING MAN 10 INCH NO ARROW
FIBER-G-B-L	RUNNING MAN 10 INCH ARROW LEFT
FIBER-G-B-R	RUNNING MAN 10 INCH ARROW RIGHT
FIBER-J-10-U	RUNNING MAN 10 INCH ARROW UP
FIBER-J-10-D	RUNNING MAN 10 INCH ARROW DOWN
FIBER-J-10-LU	RUNNING MAN 10 INCH ARROW UP LEFT
FIBER-J-10-RU	RUNNING MAN 10 INCH ARROW UP RIGHT
FIBER-J-10-LD	RUNNING MAN 10 INCH ARROW DOWN LEFT
FIBER-J-10-RD	RUNNING MAN 10 INCH ARROW DOWN RIGHT