

Bruno SD

Designed For Social Distancing

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Thin profile

Double face available
for front and back
signage

Edge-lit LED
technology



Ceiling Mount

Universal surface or
recessed, wall or ceiling
or end mounting



UNIVERSAL EDGE-LIT DESIGN

The **BRUNO SD** is truly universal edge-lit sign featuring a clean and contemporary look. The design brings style and flexibility to your next application with die-cast construction and a thin profile. The indirect LED illumination evenly lights the acrylic face with crisp, even light.

EXTERNAL SPECIFICATIONS

The **BRUNO SD** features a universal social distancing icon that is immediately recognizable. Custom variations of the sign are available.

ORDERING INFORMATION

Series	Operation	Light Source	LED Colour	Face #	Mounting	Special Wording	Options
BRU-SD	*Blank (AC only)	L (LED)	B (Blue)	0 (Universal)	M (Universal)	SW-SD (6ft apart)	BA (Brushed aluminum finish)
			G (Green)	1 (Single)	S (Surface)	SW-FC (Face covering)	PA (Polished aluminum finish)
				2 (Double)	R (Recessed)		PK12 (12" pendant kit)
							**120VDC (Specify 2 or 4 wires)
							IF (Inverted Face)


NOTES: *120/347VAC, 120VAC line cord is standard, back entry. DC input available. Please consult factory **With 120VAC only

Example: BRU-SD-L-B-U-M-SW-SD

Description: Bruno edge-lit social-distancing sign, AC only, LED, blue colour, universal face, universal mounting, 6ft apart



BeLuce Canada Inc., 3900 14th Avenue, Unit 1, Markham, ON L3R 4R3 P: (905) 948-9500 F: (905) 948-8673 www.beghellicanada.com

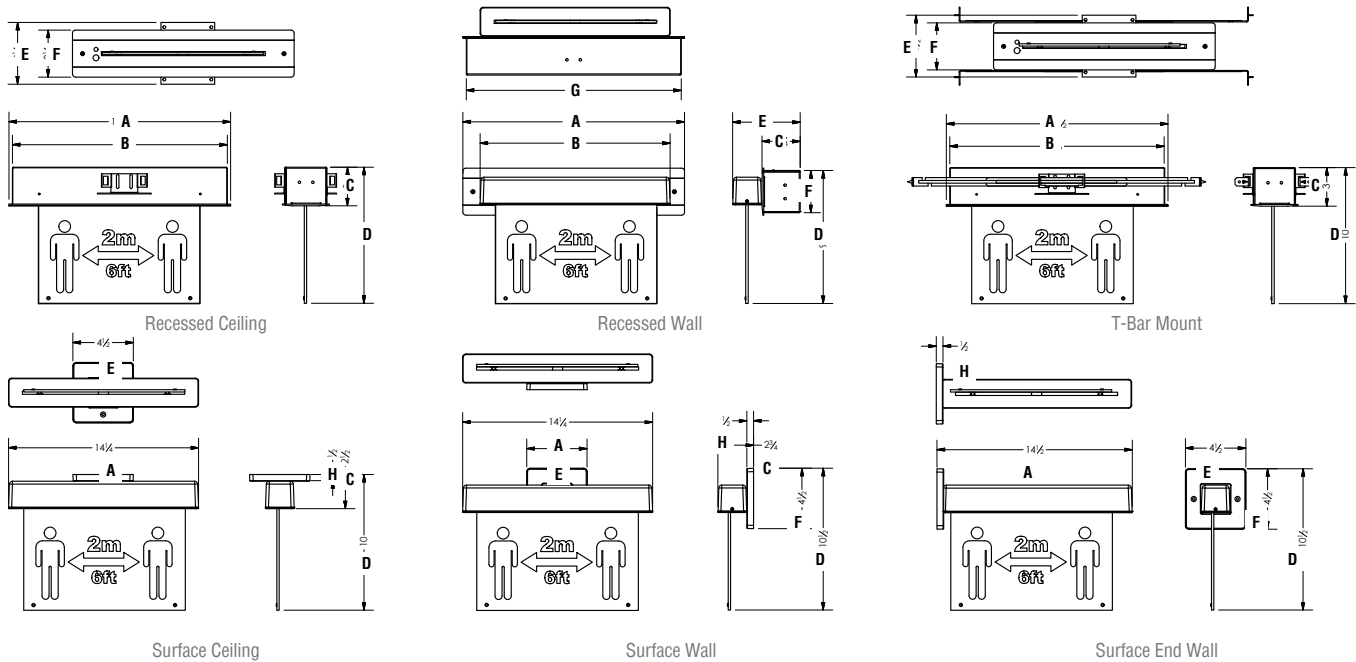DIMENSION (MM, IN.)


Model	A	B	C	D	E	F	G	H
Rec. Ceiling	419mm (16 ^{1/2} "	406mm (16")	76mm (3")	254mm (10")	114mm (4 ^{1/2} "	89mm (3 ^{1/2} "	N/A	N/A
Rec. Wall	419mm (16 ^{1/2} "	368mm (14 ^{1/2} "	70mm (2 ^{3/4} "	247mm (9 ^{3/4} "	127mm (5")	82.5mm (3 ^{1/4} "	406mm (16")	N/A
T-Bar Mount	419mm (16 ^{1/2} "	406mm (16")	76mm (3")	254mm (10")	114mm (4 ^{1/2} "	89mm (3 ^{1/2} "	N/A	N/A
Surf. Ceiling	362mm (14 ^{1/4} "	N/A	63.5mm (2 ^{1/2} "	254mm (10")	114mm (4 ^{1/2} "	N/A	N/A	13mm (1/2")
Surf. Wall	362mm (14 ^{1/4} "	N/A	70mm (2 ^{3/4} "	254mm (10")	114mm (4 ^{1/2} "	114mm (4 ^{1/2} "	N/A	13mm (1/2")
Surf. End Wall	368mm (14 ^{1/2} "	N/A	N/A	254mm (10")	114mm (4 ^{1/2} "	114mm (4 ^{1/2} "	N/A	13mm (1/2")

STANDARD PICTOGRAMS


Forma SD Designed For Social Distancing

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Wall, ceiling or
end mounting

High-output LED
technology



Die-cast aluminum
housing

AC Only

Double face available
for front and back
signage



EXTERNAL SPECIFICATIONS

The **FORMA SD** features a universal social distancing icon that is immediately recognizable. Custom variations of the sign are available. Comes standard with a line cord from the back.

ORDERING INFORMATION

Series	Operation	Light Source	LED Colour	Face#	Mounting	Special Wording	Options
FM-SD	*Blank (AC only)	L (LED)	B (Blue)	1 (Single)	W (Wall mount, no canopy)	SW-SD (6ft apart)	WG (Wireguard)
			G (Green)	2 (Double)	M (Universal mount, wall, ceiling or end)	SW-FC (Face covering)	TP (Tamper proof screws)
				0 (Universal)			PK12 (12" pendant kit)
							DL (Damp Location)
							FL (Flashing Alarm)
							**F (Fibre only)


NOTES: *120/347VAC, 120VAC line cord is standard, back entry. DC input available. Please consult factory

**Please see fibre only ordering chart

Example: FM-SD-L-B-U-M-SW-SD

Description: Forma social-distancing sign, AC only, LED, blue colour, universal face, universal mounting, special wording - 6ft apart

DIMENSIONS (MM, IN.)

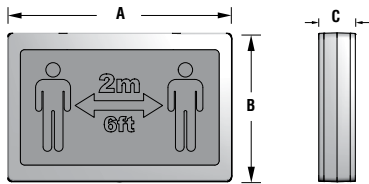

Series	A	B	C
FM-SD	324mm	216mm	57mm
	12 3/4"	8 1/2"	2 1/4"

DIE-CAST DESIGN

The excellent visual performance and an architecturally pleasing design makes the **FORMA SD** series the premier choice for applications requiring the durability and the craftsmanship of die-cast aluminum signs. The standard brushed aluminum face blends well with any setting and provides a clean, modern look. The die-cast aluminum construction provides the **FORMA SD** with exceptional strength and rigidity.

MECHANICAL SPECIFICATIONS

The **FORMA SD** is constructed from durable die-cast aluminum. Universal mounting pattern is stamped on the back. The **FORMA SD** is supplied standard with a brushed aluminum face(s) and a black baked powder coat finished housing. The faceplate is held securely in place with a screw and a pivot bracket system that allows for complete access to the interior of the sign.

INSTALLATION

The **FORMA SD** is suitable for ceiling, wall and end mounting. Suitable for indoor installations.

FIBRE ONLY ORDERING CHART

Part Number	Sign
276501562	Blue 2m/6ft social distancing sign
276501565	Blue face covering required sign
276501561	Green 2m/6ft social distancing sign
276501564	Green face covering required sign

Please order directly using these part numbers

STANDARD PICTOGRAMS



Fortezza™ SD

Designed For Social Distancing



Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

AC Only or Universal DC

UV resistant
polycarbonate faceplate

Vandal resistant to
withstand extreme abuse



Heavy gauge die-cast
aluminum housing

Surface wall, ceiling
or end mounting

Double face available
for front and back
signage



EXTERNAL SPECIFICATIONS

The **FORTEZZA™ SD** features a universal social distancing icon that is immediately recognizable. Custom variations of the sign are available. Comes standard with a line cord from the back.

ORDERING INFORMATION

Series	Operation	LED	LED Colour	Face #	Mounting	Special Wording	Options
FTZ-SD	*HT (AC only)	L (LED)	B (Blue)	1 (Single)	U (Universal mount)	SW-SD (6ft apart)	BB (Black body)
			G (Green)	2 (Double)	W (Wall - no canopy)	SW-FC (Face covering)	WW (White body)
							FL (Flashing alarm)
							PK (Pendant kit)
							**120VDC (Specify 2 or 4 wires)
							***F (Fibre only)

NOTES: *120/347VAC, 120VAC line cord is standard, back entry. DC input available. Please consult factory


**Specify open/closed/6-24 VAC

***Please see fibre only ordering chart

Example: FTZ-SD-HT-L-B-1-U-120-347V-SW-SD

Description: Fortezza™ social-distancing sign, AC only, LED, blue colour, single face, universal mounting, special wording - 6ft apart

DIMENSIONS (MM, IN.)



Series	A	B	C	D	E
FTZ-SD	356mm	229mm	157mm	254mm	102mm
	14"	9"	6 1/5"	10"	4"

VANDAL RESISTANT DESIGN

The ultra heavy duty design and appearance of the **FORTEZZA™ SD** series sign warns potential vandals that this is no regular sign. The pictogram is protected by a 1/8" thick, impact resistant polycarbonate shield that is recessed into the housing and fastened with 4 tamper resistant screws. The **FORTEZZA™ SD** offers a contemporary look and durability like no other.

MECHANICAL SPECIFICATIONS

The **FORTEZZA™ SD** series is constructed of extra heavy duty cast aluminum with a 1/8" thick polycarbonate protective shield. Tamper resistant screws are standard. The **FORTEZZA™ SD** is standard in an attractive matte black finish. The polycarbonate face shield is recessed into the housing making the **FORTEZZA™ SD** series one of the most rigid, yet attractive high abuse signs on the market.

SANITATION LISTED (SL)

The **FORTEZZA™ SD** is sanitation listing approved. The Intertek verified splash zone listing is equivalent to the NSF standard 2, meeting the rigorous sanitation, electrical safety and performance standards of food service environments.

STANDARD PICTOGRAMS



FIBRE ONLY ORDERING CHART

Part Number	Sign
276501562	Blue 2m/6ft social distancing sign
276501565	Blue face covering required sign
276501561	Green 2m/6ft social distancing sign
276501564	Green face covering required sign

Please order directly using these part numbers

Guida SD Designed For Social Distancing

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____



EXTERNAL SPECIFICATIONS

The **GUIDA SD** features a universal social distancing icon that is immediately recognizable. Custom variations of the sign are available.

EDGE-LIT DESIGN

The **GUIDA SD** series of elegantly designed edge-lit signs feature a clean and contemporary look. The design brings style and flexibility to your next prestigious exit sign application. The indirect LED illumination evenly lights the acrylic face with crisp, even light. The wide variety of finishes and mounting configurations available will ensure that the **GUIDA SD** can be easily matched to your decor.

ORDERING INFORMATION


Series	Operation	Light Source	LED Colour	Face #	Mounting	Special Wording	Options
GD-SD	*Blank (AC only)	L (LED)	B (Blue)	1 (Single)	RC (Recessed ceiling)	SW-SD (6ft apart)	BA (Brushed aluminum finish)
			G (Green)	2 (Double)	SC (Surface ceiling)	SW-FC (Face covering)	PK12 (12" pendant kit)
					SW (Surface wall)		**120VDC (Specify 2 or 4 wires)
					SE (Surface end wall)		FL (Flashing Alarm)
					RW (Recessed wall)		IF (Inverted Face)

NOTES: *120/347VAC, 120VAC line cord is standard, back entry. DC input available. Please consult factory **With 120VAC only


Example: GD-SD-L-B-1-RC-SW-SD

Description: Guida social-distancing sign, AC only, LED, blue colour, single face, recessed ceiling mount, special wording - 6ft apart

DIMENSION (MM, IN.)

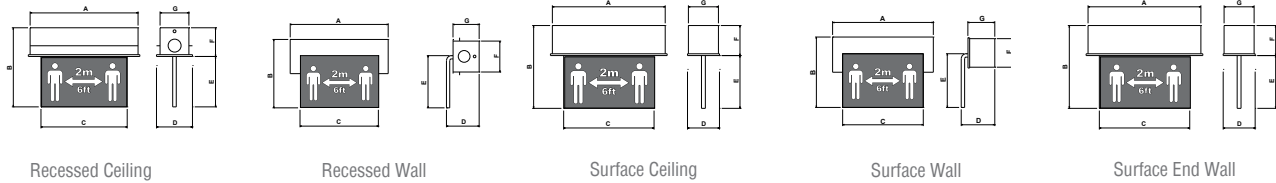

Model	A	B	C	D	E	F	G
Rec. Ceiling	14" (356mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4 1/4" (108mm)
Rec. Wall	14" (356mm)	10 1/2" (267mm)	12" (305mm)	6" (152mm)	8" (203mm)	4" (102mm)	4" (102mm)
Surf. Ceiling	14 1/4" (362mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4 1/4" (108mm)
Surf. Wall	14 1/4" (362mm)	10" (254mm)	12" (305mm)	6" (152mm)	8" (203mm)	4" (102mm)	4 1/4" (108mm)
Surf. End Wall	14 1/4" (362mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4" (102mm)



INSTALLATION

Universal mounting pattern and key hole slots are stamped into the housing providing various mounting options. Ceiling recessed versions are supplied standard with removable steel T-bar ceiling tile mounting brackets. All trim plates are supplied standard with an attractive and durable white, baked powder coat finish. Recessed version faceplates are held securely in place with two [2] torsion spring clips that allows the faceplate to accommodate uneven or angled ceilings and walls. The **GUIDA SD** is suitable for recessed and surface ceiling or wall mounting. Suitable for indoor installations.

Trim and faceplate mount into backbox for quick and easy installation.

STANDARD PICTOGRAMS



Micra SD

Designed For Social Distancing

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Wall, ceiling or
end mounting

Ultra thin
one-piece body

High-output LED
technology



Extruded aluminum
housing

AC Only


Double face available for
front and back signage



EXTERNAL SPECIFICATIONS

The **MICRA SD** features a universal social distancing icon that is immediately recognizable. Custom variations of the sign are available. Comes standard with a line cord from the back.

DIMENSIONS (MM, IN.)



Series	A	B	C
MC-SD	305mm	229mm	32mm
	12"	9"	1 1/4"

ORDERING INFORMATION

Series	Operation	Light Source	LED Colour	Face#	Mounting Type	Special Wording	Options
MC-SD	*Blank (AC only)	L (LED)	B (Blue)	1 (Single)	W (Wall - no canopy)	SW-SD (6ft apart)	AN (Clear anodized finish)
			G (Green)	2 (Double)	C (Ceiling)	SW-FC (Face covering)	BA (Brushed aluminum finish)
					E (End)		TP (Tamper proof screw)
							PK12 (12" pendant kit)
							**120VDC (Specify 2 or 4 wires)
							***F (Fibre only)

NOTES: *120/347VAC, 120VAC line cord is standard, back entry. DC input available. Please consult factory

**With 120VAC only

***Please see fibre only ordering chart

Example: MC-SD-L-B-1-W-SW-SD

Description: Micra social-distancing sign, AC only, LED, blue colour, single face, wall mount, special wording - 6ft apart



BeLuce Canada Inc., 3900 14th Avenue, Unit 1, Markham, ON L3R 4R3 P: (905) 948-9500 F: (905) 948-8673 www.beghellcanada.com

ADVANCED DESIGN

The **MICRA SD** series of extruded aluminum signs feature an ultra thin “fusion” one-piece body. The design incorporates cutting edge technology, producing one of the slimmest aluminum egress signs ever manufactured. The one-piece body is extremely rigid and holds all of the LED circuitry in precision formed mounting channels. The LED illumination provided by this design evenly illuminates the sign face; while the ultra thin design “traps” light, further enhancing output. The canopy has been custom designed to complement the ultra thin appearance of the **MICRA SD**, as well as provide a stable and rigid mounting platform. A wide variety of finishes are available, ensuring that the **MICRA SD** can be suited to your installation.

INSTALLATION

The **MICRA SD** is suitable for ceiling, wall and end mounting. Suitable for indoor installations.



MECHANICAL SPECIFICATIONS

The **MICRA SD** “fusion” body is constructed from a single piece of extruded aluminum. All mounting channels are extruded with the housing at the time of manufacture, adding to the rigidity of the sign. The housing end plates are machined from solid aluminum and secured to the housing with two [2] recessed screws. The **MICRA SD** canopy is made from 16 gauge steel and is attached to the housing at the factory to provide the most secure mounting possible.

FIBRE ONLY ORDERING CHART

Part Number	Sign
276501562	Blue 2m/6ft social distancing sign
276501565	Blue face covering required sign
276501561	Green 2m/6ft social distancing sign
276501564	Green face covering required sign

Please order directly using these part numbers

STANDARD PICTOGRAMS

Ottica SD

Designed For Social Distancing

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Extruded aluminum
cylindrical design

Edge-lit LED
technology



AC Only

Surface wall, ceiling
or end mounting

Double face available for
front and back signage



EXTERNAL SPECIFICATIONS

The **OTTICA SD** features a universal social distancing icon that is immediately recognizable. Custom variations of the sign are available.

ORDERING INFORMATION


Series	Operation	Light Source	LED Colour	Mounting (Surface)	Face #	Special Wording	Options
OT-SD	*Blank (AC only)	L (LED)	B (Blue)	WC (Wall & Ceiling)	1 (Single)	SW-SD (6ft apart)	BA (Brushed aluminum finish)
			G (Green)	E (End)	2 (Double)	SW-FC (Face covering)	PA (Polished aluminum finish)
							IF (Inverted face)

NOTE: *120/347VAC, 120VAC line cord is standard, back entry. DC input available. Please consult factory

Example: OT-SD-L-B-WC-1-SW-SD

Description: Ottica edge-lit social-distancing sign, AC only, LED, blue colour, single face, wall & ceiling mount, special wording - 6ft apart

DIMENSION (MM, IN.)

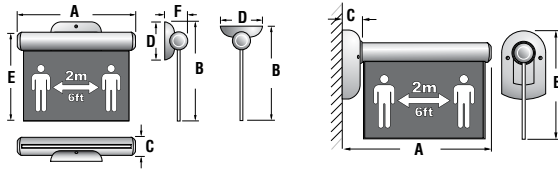

Wall & Ceiling Mount

End Mount

Model	A	B	C	D	E	F
Wall	12 1/2" (318mm)	10 9/50" (259mm)	2" (51mm)	4 1/2" (114mm)	9" (229mm)	3" (76mm)
Ceiling	12 1/2" (318mm)	10 3/20" (258mm)	2" (51mm)	4 1/2" (114mm)	9" (229mm)	N/A
End	14 1/2" (368mm)	10" (254mm)	2" (51mm)	N/A	N/A	N/A

MODERN DESIGN

The **OTTICA SD** series of cylindrical designed edge-lit egress signs feature a radical, high-tech look. The design lends cutting edge technology and style to today's modern interior applications. The one-piece cylindrical body is extremely rigid and holds all of the LED circuitry in precision formed mounting channels. The indirect LED illumination provided by this design evenly lights the acrylic face with crisp, even light. A wide variety of finishes and mounting configurations available will ensure that the **OTTICA SD** can be suited to your installation.

MECHANICAL SPECIFICATIONS

The **OTTICA SD** cylindrical housing is constructed of sturdy extruded aluminum. All mounting channels are extruded with the housing at the time of manufacture, adding to the rigidity of the sign. The housing end caps are machined from solid aluminum and secured to the housing with a centered screw. The **OTTICA SD** canopy is made from die-cast aluminum and is attached to the housing at the factory to provide the most secure mounting possible. The **OTTICA SD** is supplied standard with a durable white, baked powder coat finish.

INSTALLATION

The **OTTICA SD** is suitable for wall & ceiling (includes sloped ceiling) or end mounting. Suitable for indoor installations.

STANDARD PICTOGRAMS



Quadra SD Designed For Social Distancing

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Wall, ceiling or end
mounting

High-output LED
technology



Extruded aluminum
housing

AC Only

Double face available for
front and back signage



EXTERNAL SPECIFICATIONS

The **QUADRA SD** features a universal social distancing icon that is immediately recognizable. Custom variations of the sign are available. Comes standard with a line cord from the back.



ORDERING INFORMATION

Series	Operation	Light Source	LED Colour	Face #	Mounting	Special Wording	Options
QR-SD	*Blank (AC only)	L (LED)	B (Blue)	1 (Single)	W (Wall mount no canopy)	SW-SD (6ft apart)	BA (Brushed aluminum finish)
			G (Green)	2 (Double)	M (Universal mount wall, ceiling or end)	SW-FC (Face covering)	WG (Wireguard)
				0 (Universal)			PK12 (12" pendant kit)
							AN (Anodized finish)
							TP (Tamper proof screws)
							**120VDC (Specify 2 or 4 wires)
							LXN (Lexan shield)
							FL (Flashing Alarm)
							***F (Fibre only)

NOTES: *120/347VAC, 120VAC line cord is standard, back entry. DC input available. Please consult factory


**With 120VAC only

***Please see fibre only ordering chart

Example: QR-SD-L-B-1-W-SW-SD

Description: Quadra social-distancing sign, AC only, LED, blue colour, single face, wall mount, special wording - 6ft apart


DIMENSIONS (MM, IN.)



Series	A	B	C
QR-SD	197mm	330mm	51mm
	7 3/4"	13"	2"

EXTRUDED DESIGN

The clean lines and thin design of the **QUADRA SD** series provides it with a modern and attractive appearance. The extruded aluminum frame contains no external holes or slots adding to the clean look while eliminating unwanted light leaks. The extruded aluminum forms a rigid and durable frame that can be securely mounted in any application. The pictogram and backplates are mounted into the frame using a pin and channel system that permits simple and speedy removal during installation. This design also eliminates the need for any visible screws or fasteners.

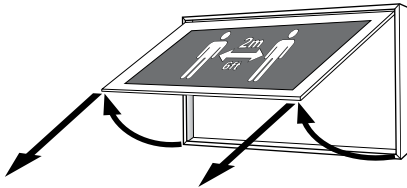

Faceplate slides up and outwards for quick and easy installation.

STANDARD PICTOGRAMS



MECHANICAL SPECIFICATIONS

The **QUADRA SD** is constructed of sturdy extruded aluminum. Universal mounting pattern and key hole slots are stamped on the backplate. Surface mount conduit entry knockouts are also provided. The **QUADRA SD** is supplied standard with an attractive and durable white, baked powder coat finish. The pictogram is held securely in place with a pin and channel system that allows it to slide in the frame providing complete access to the interior of the sign. No visible screws, nuts or fasteners are used that would detract from the clean, modern design.

INSTALLATION

The **QUADRA SD** is suitable for surface ceiling, wall and end mounting. Suitable for indoor installations.

FIBRE ONLY ORDERING CHART

Part Number	Sign
276501562	Blue 2m/6ft social distancing sign
276501565	Blue face covering required sign
276501561	Green 2m/6ft social distancing sign
276501564	Green face covering required sign

Please order directly using these part numbers

Stella SD

Designed For Social Distancing

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Wall, ceiling or end
mounting

High-output LED
technology



20 gauge steel housing


AC Only

Double face available for
front and back signage

EXTERNAL SPECIFICATIONS

The **STELLA SD** features a universal social distancing icon that is immediately recognizable. Custom variations of the sign are available. Comes standard with a line cord from the back.

DIMENSIONS (MM, IN.)



Series	A	B	C
SL-SD	305mm	191mm	57mm
	12"	7 1/2"	2 1/4"

ORDERING INFORMATION

Series	Operation	Light Source	LED Colour	Face #	Mounting	Special Wording	Options
SL-SD	*Blank (AC only)	L (LED)	B (Blue)	1 (Single)	W (Wall mount no canopy)	SW-SD (6ft apart)	PK12 (12" pendant kit)
			G (Green)	2 (Double)	M (Universal mount wall, ceiling or end mount)	SW-FC (Face covering)	TP (Tamper proof screws)
				0 (Universal)			WG (Wireguard)
							**120VDC (Specify 2 or 4 wires)
							FL (Flashing Alarm)
							***F (Fibre only)


NOTES: *120/347VAC, 120VAC line cord is standard, back entry. DC input available. Please consult factory **With 120VAC only ***Please see fibre only ordering chart

Example: SL-SD-L-B-1-W-SW-SD

Description: Stella social-distancing sign, AC only, LED, blue colour, single face, wall mount, special wording - 6ft apart

MODERN DESIGN

The modern and thin design of the **STELLA SD** series provides a clean and attractive appearance. The 20 gauge steel frame contains no external holes or slots adding to the clean look while eliminating unwanted light leaks. The 20 gauge steel forms a rigid and durable frame that can be securely mounted in any application. The face and backplates are mounted into the frame using a channel system that permits simple and speedy removal during installation.

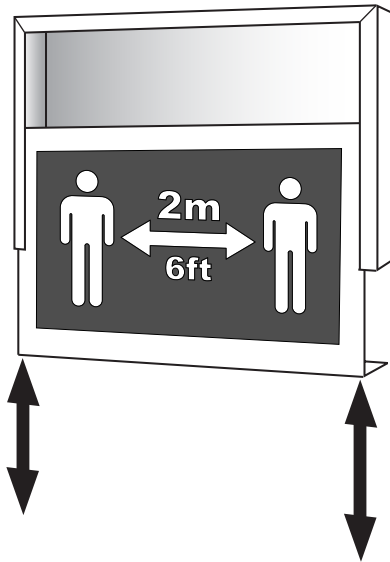

Faceplate slides out for quick and easy installation.

MECHANICAL SPECIFICATIONS



The **STELLA SD** is constructed of durable 20 gauge steel. Universal mounting pattern and key hole slots are stamped on the backplate. Surface mount conduit entry knockouts are also provided. The **STELLA SD** is supplied standard with an attractive and durable white, baked powder coat finish. The advanced design of the **STELLA SD** leaves it with no extraneous holes or slots, thereby eliminating unwanted light leaks. A simple and sturdy channel design securely holds the pictogram and backplates into the frame providing quick and trouble-free installations.

FIBRE ONLY ORDERING CHART

Part Number	Sign
276501562	Blue 2m/6ft social distancing sign
276501565	Blue face covering required sign
276501561	Green 2m/6ft social distancing sign
276501564	Green face covering required sign

Please order directly using these part numbers

STANDARD PICTOGRAMS



Verde SD Designed For Social Distancing

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Wall, ceiling or end
mounting

High-output LED
technology



Thermoplastic housing

Attractive low profile
design


Double face available for
front and back signage



EXTERNAL SPECIFICATIONS

The **VERDE SD** features a universal social distancing icon that is immediately recognizable. Custom variations of the sign are available. Comes standard with a line cord from the back.

DIMENSIONS (MM, IN.)

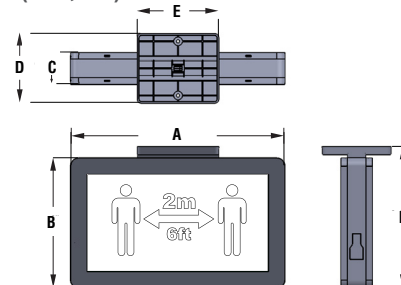

Series	A	B	C	D	E	F
VE-SD	333mm	203mm	51mm	108mm	127mm	222mm
	13 ^{1/8"}	8"	2"	4 ^{1/4"}	5"	8 ^{3/4"}

ORDERING INFORMATION

Series	Operation	Light Source	LED Colour	Face #	Mounting	Special Wording	Options
VE-SD	*Blank (AC only)	L (LED)	B (Blue)	0 (Universal)	M (Universal mount wall, ceiling or end mount)	SW-SD (6ft apart)	BLK (Black Housing)
			G (Green)	1 (Single)		SW-FC (Face covering)	WG (Wireguard)
				2 (Double)			**120VDC (Specify 2 or 4 wires)
							FL (Flashing Alarm)
							***F (Fibre only)

NOTES: *120/347VAC, 120VAC line cord is standard, back entry. DC input available. Please consult factory

**With 120VAC only

***Please see fibre only ordering chart

Example: VE-SD-L-B-1-M-SW-SD

Description: Verde social-distancing sign, AC only, LED, blue colour, single face, universal mount, special wording - 6ft apart



MODERN DESIGN

The low profile design of the **VERDE SD** series exit provides a clean, attractive and affordable solution. The durable thermoplastic housing is corrosion and flame resistant. The modern and efficient design of the **VERDE SD** series allows for wall, ceiling or end mounting. Canopy and all installation hardware is included.

MECHANICAL SPECIFICATIONS

The **VERDE SD** series is constructed of durable corrosion and flame resistant thermoplastic. The **VERDE SD** series can be universally mounted single or double face. Canopy and mounting hardware are included.

INSTALLATION

The **VERDE SD** is suitable for surface ceiling, wall and end mounting. Suitable for indoor installations.

STANDARD PICTOGRAMS



FIBRE ONLY ORDERING CHART

Part Number	Sign
276501562	BLUE 2M/6FT SOCIAL DISTANCING SIGN
276501565	BLUE FACE COVERING REQUIRED SIGN
276501561	GREEN 2M/6FT SOCIAL DISTANCING SIGN
276501564	GREEN FACE COVERING REQUIRED SIGN

Please order directly using these part numbers