



PREZZO STANDALONE UNIT

3.6V Plastic Battery Unit

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____


FEATURES & BENEFITS

- LED ultra-bright light source
- Lumens: 150lm
- 120/277 VAC Input, field selectable
- Power consumption: 120V/0.06A/0.4W or 277V/0.07A/0.5W
- 3.6V maintenance free NI-CAD battery
- 90 minutes emergency lighting duration
- 3.6V 1W long life LED light source, 6000K
- CSA C22.2 No. 141-15 Performance Certified

MECHANICAL

- Injection molded thermoplastic housing
- Suitable for damp location
- Fully adjustable lamp holder location
- White colour is standard
- Solid state transfer and battery charger
- Wall and ceiling mount installations
- Temperature +10°C to +40°C

DIMENSIONS

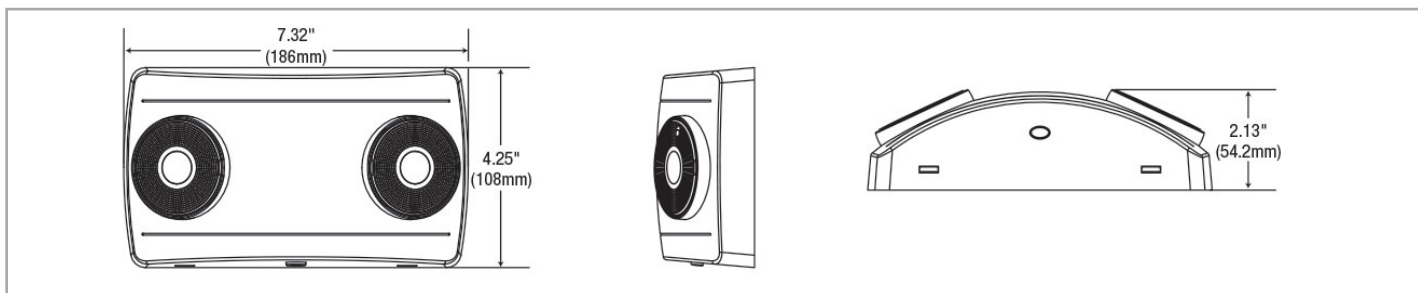

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
19000034	PZ-U-3.6-120277V	PREZZO SERIES PLASTIC STANDALONE BATTERY UNIT 3.6V 2 x 1W LED LAMP 2W REMOTE CABILITY 120277V INPUT