



PREZZO WEATHERPROOF RM

Thermoplastic Running Man

Project Name: _____ Model Number: _____

Prepared By: _____ Date: _____

FEATURES & BENEFITS

- 120/347 VAC input
- 120 minutes emergency duration
- Maintenance free, 3.6V Ni-cad battery
- Wet location
- IP65
- Cold Weather temperature: -25°C to +50°C
- CSA 22.2 No. 141

MECHANICAL


- High impact thermoplastic construction
- Universal faces
- Ceiling mount, Wall mount, End mount

UNIVERSAL PICTOGRAMS

The standard OLR (Universal) includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



DIMENSIONS

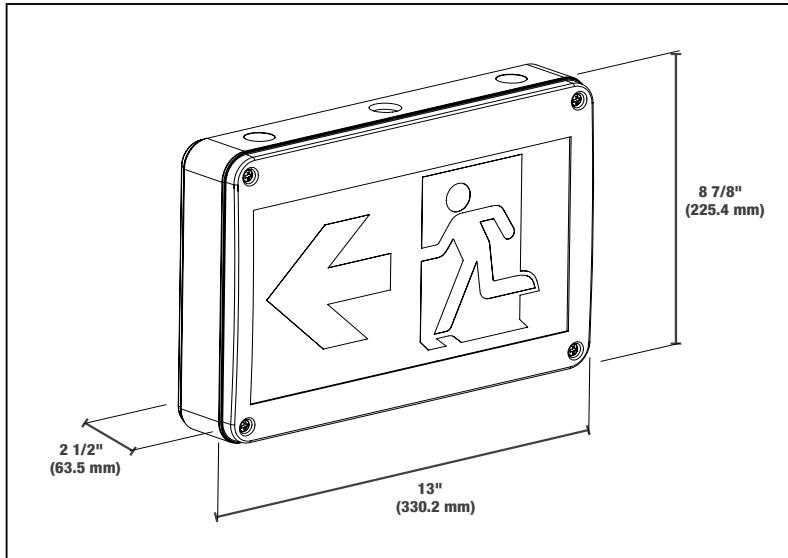

ORDERING GUIDE

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
*19000083	PZ-WP-RM-SP-U-OLR-M	PREZZO WEATHERPROOF RM SIGN SERIES 120MIN SELF POWERED UNIVERSAL FACE/PICTOGRAM/ MOUNT WHITE FINISH 120347V INPUT
*19000084	PZ-WP-RM-SP-U-OLR-M-IH	PREZZO WEATHERPROOF RM SIGN SERIES 120MIN SELF POWERED UNIVERSAL FACE/PICTOGRAM/ MOUNT WHITE FINISH INTERNAL HEATER 120347V INPUT

Note*: Longer lead time