

**EXIT SORTIE**

# QUADRA B6L


Extruded Aluminum LED Bilingual

Project Name: \_\_\_\_\_ Model Number: \_\_\_\_\_  
Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

## FEATURES & BENEFITS

- Wall, ceiling or end mounting
- Field removable chevrons
- High-output LED technology
- Extruded aluminum housing
- AC Only, Self-Powered or Universal DC
- CSA 22.2 No. 141-15 Performance Certified

## DIMENSIONS

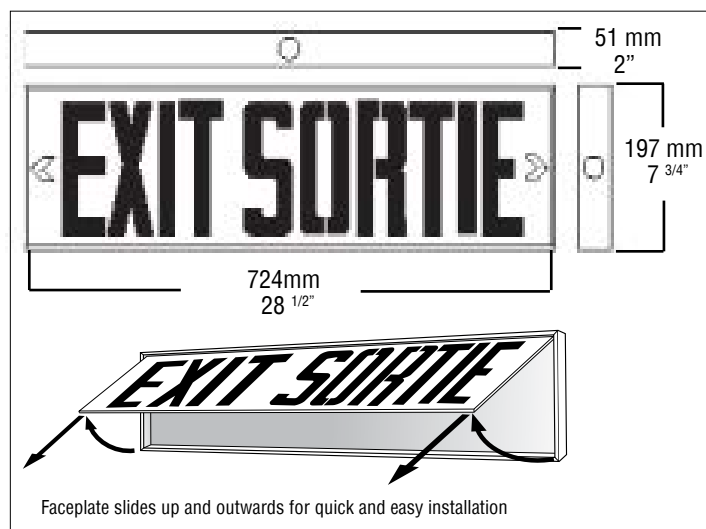

## EXTERNAL SPECIFICATIONS

The QUADRA-B6L is constructed from durable extruded aluminum. The QUADRA-B6L comes standard with a white baked powder coat finish. Available in custom epoxy-based powder coat finishes (please specify). Single or double face version must be specified. Universal mounting pattern and key hole slots are stamped into the backplate. Removable chevron arrows are standard on each fixture. The self-powered version comes standard with an external LED status indicator and test switch.

## INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED: comes standard configured with high-output LED technology and 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

## BATTERY TECHNOLOGY

Designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

## ORDERING GUIDE

SERIES	OPERATION	LIGHT SOURCE	LETTER COLOUR	FACE#	MOUNTING	OPTIONS
QR-B6L-ES (Exit/Sortie)	Blank (AC only) SP (Self-powered)	L (LED)	R (Red)	1 (Single) 2 (Double) U (Universal)	W (Wall mount no canopy) M (Universal wall, ceiling or end mount) E (End mount with support bracket)	CC (Custom colour - specify) BA (Brushed aluminum finish) SW (Special wording - specify) WG (Wireguard) PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) TP (Tamper proof screws)
QR-B6L-SE (Sortie/Exit)						

NOTE: E End mount canopy is factory installed (Customer to supply eye hook and support cable/wire)