



QUADRA EXIT OR SORTIE COMBO


Extruded Aluminum LED Combo

Project Name: _____ Model Number: _____
Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- Field removable chevrons
- High-output LED technology
- Extruded aluminum housing
- Up to 55W lamps
- Up to 6V-50W or 12V-72W capacity
- Fully automatic current limited charger
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

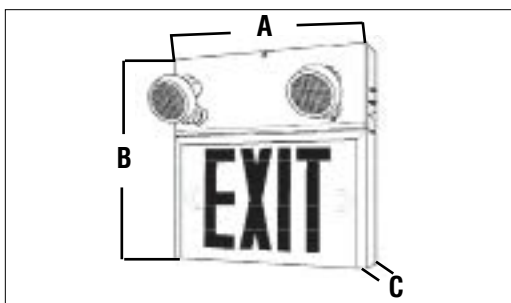

SERIES	A	B	C
Exit	330mm (13")	318mm (12 1/2")	64mm (2 1/2")
Sortie	470mm (18 3/4")	318mm (12 1/2")	64mm (2 1/2")

LAMP SELECTION

	6V	12V
Composite Tungsten	7.2, 9W	9, 12, 18W
Quartz (Q)	12W	12, 20 (55W PAR36 only)
LED-MR16	5, 7W	2, 5, 7W
MR16*	N/A	20, 35, 50W
LED Module (array)	3, 4W	3, 4W
TES	N/A	5, 9, 14W
Sealed Beam LED (PAR36 only)	N/A	6W

* MR16 not available in SR head

ORDERING GUIDE

SERIES	WATTS	LIGHT SOURCE	LETTER COLOUR	FACE#	MOUNTING	HEADS	LAMP	OPTIONS
QR-E (Exit) QR-S (Sortie)	6-36 6-50 12-36 12-72	L (LED)	R (Red)	1 (Single) 2 (Double) U (Universal)	W (Wall) C (Ceiling) M (Universal)	0 (None) 1SR (One head) 2SR (Two heads) 1LR (One head) 2LR (Two heads) 1BTMR (One head) 2BTMR (Two heads) 1SEA (one MR16 head) 2SEA (two MR16 heads) 1TESSQ (one head, HO) 2TESSQ (two heads, HO)	See lamp selection	CC (Custom colour - specify) TD (Time delay-specify 5,10,20mins) WG (Wireguard) PK12 (12" pendant kit) AT (Auto-test) SM (Side mount heads) TP (Tamper proof screws)

NOTE: Cabinet size may increase depending on options chosen. *AC voltage must be specified, 10min is default.

EXTERNAL SPECIFICATIONS

The QUADRA Combination is constructed from durable extruded aluminum. The QUADRA Combination comes standard with a white baked powder coat finish. Available in custom epoxy-based powder coat finishes (please specify). Universal mounting pattern and key hole slots are stamped into the backplate. Removable chevron arrows are standard on each fixture. Standard external LED status indicators and push button test switch. Heads are molded from high impact thermoplastic in a matching colour; SR PAR18 standard.

INTERNAL SPECIFICATIONS

SELF-POWERED: Standard versions use a valve regulated, sealed lead-acid battery to provide the emergency lighting duration as specified per unit. LED standard 120/347V input. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BELUCE AUTO-TEST (AT)

The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability, as required by the fire code.

BATTERY TECHNOLOGY

The QUADRA Combo is designed with a maintenance free, valve regulated sealed lead-acid battery providing emergency lighting duration as specified per unit. Recharge time of the battery is 24 hours.

MODEL RATING GUIDE

MODEL	VOLTAGE (OUTPUT)	WATTAGE RATING 30MIN	WATTAGE RATING 120MIN
QR6-36	6	36	10
QR6-50	6	50	15
QR12-36	12	36	10
QR12-72	12	72	22