



# QUADRA EXIT


Extruded Aluminum LED Exit

Project Name: \_\_\_\_\_ Model Number: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

## FEATURES & BENEFITS

- Wall, ceiling or end mounting
- Field removable chevrons
- High-output LED technology
- Extruded aluminum housing
- AC Only, Self-Powered or Universal DC
- CSA 22.2 No. 141-15 Performance Certified

## DIMENSIONS

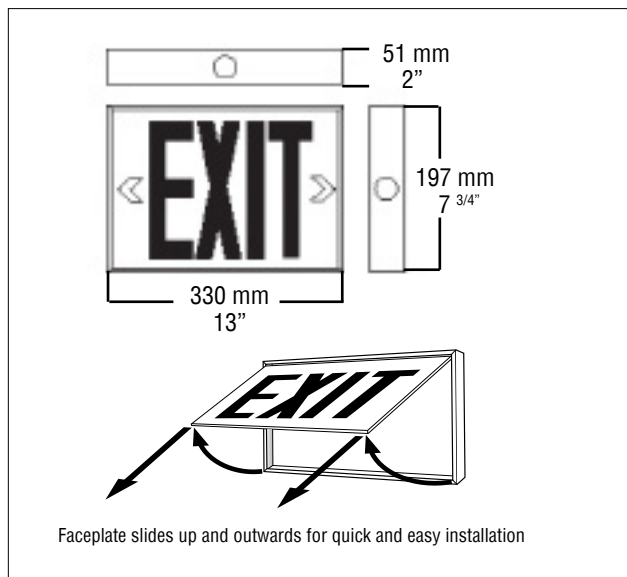

## EXTERNAL SPECIFICATIONS

The QUADRA is constructed from durable extruded aluminum. The QUADRA comes standard with a white baked powder coat finish. Available in custom epoxy-based powder coat finishes (please specify). Single, double or universal face versions must be specified. Universal mounting pattern and key hole slots are stamped into the backplate. Removable chevron arrows are standard on each fixture. The self-powered version comes standard with an external LED status indicator and test switch.

## INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED: comes standard configured with high-output LED technology and 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

## BATTERY TECHNOLOGY

Designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

## BELUCE AUTO-TEST (AT)

The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability, as required by the fire code.

## ORDERING GUIDE

SERIES	OPERATION	LIGHT SOURCE	LETTER COLOUR	FACE#	MOUNTING	VOLTAGE	OPTIONS
QR-E (Exit)	Blank (AC only) SP (Self-powered)	L (LED)	R (Red)	1 (Single) 2 (Double) U (Universal)	<sup>2</sup> W (Wall mount no canopy) M (Universal wall, ceiling or end mount)	120/347VAC 120/277VAC <sup>1</sup> 120VAC	CC (Custom colour - specify) BLK (Black) BA (Brushed aluminum finish) SW (Special wording - specify) WG (Wireguard) <sup>3</sup> PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) TP (Tamper proof screws) AT (Auto-test, SP only) <sup>1</sup> 120VDC2 (2 wires) <sup>1</sup> 120VDC4 (4 wires)

NOTE: White components are the default. <sup>1</sup> With 120VAC only; <sup>2</sup> Single face only; <sup>3</sup> Available in universal mounting only