



QUADRA RECESSED RM

Extruded Aluminum LED Running Man

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____


FEATURES & BENEFITS

- Wall mount recessed mounting
- High-output LED technology
- Extruded aluminum frame
- AC Only or UDC
- 20 gauge steel
- CSA 22.2 No. 141-15 Performance Certified

EXTERNAL SPECIFICATIONS

The QUADRA RECESSED face is constructed from durable aluminum. The unit comes standard with a white baked powder coat finish. Available in custom epoxy-based powder coat finishes (please specify). Universal mounting pattern and key hole slots are stamped into the backplate. The self-powered version comes standard with an external LED status indicator and test switch.

DIMENSIONS

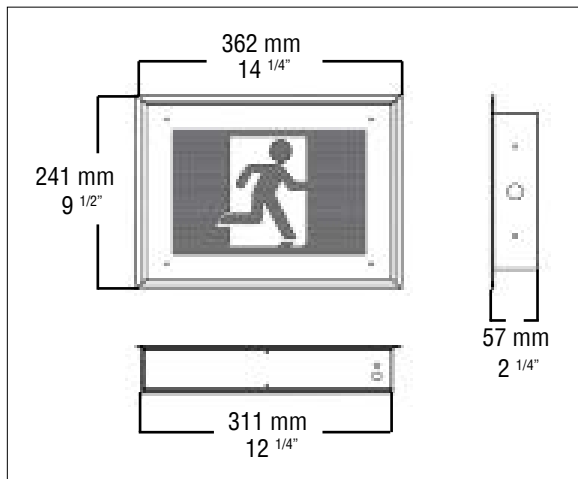

INTERNAL SPECIFICATIONS

AC ONLY and AC/DC: comes standard configured with high-output LED technology and 120/347VAC input. Solid state charger and transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

UNIVERSAL PICTOGRAMS

The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



ORDERING GUIDE

QRR-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	FACE#	PICTOGRAM	MOUNTING	VOLTAGE	OPTIONS
QRR-RM	Blank (AC only)	L (LED)	1 (Single)	OLR (Universal pictograms) O (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall mount - recessed)	120/347VAC 120/277VAC *120VAC	CC (custom colour - specify) BA (Brushed aluminum finish) TP (Tamper proof screws) SW (Special wording - specify) WG (Wireguard) UDC (Universal 6 - 24VDC) SW-OL (RM no indicator, left) *120VDC (Specify 2 or 4 wires)

NOTE: White components default. *With 120VDC option only