



SICURA EXIT

Hazardous Exit and Sortie


Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Surface wall, ceiling or pendant mount
- Field removable chevrons
- 20 gauge steel frame and face
- Corrosion resistant heavy-duty cast aluminum housing
- Hazardous location: Class I, Div 1 Groups B,C,D Class I, Div 2 Groups A,B,C,D Class II, Div 1&2 Groups E,F,G Class III, Div 1&2
- Operating temperature: -20°C to +40°C
- 12 or 24VDC, or 120VAC
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

Contact factory for details

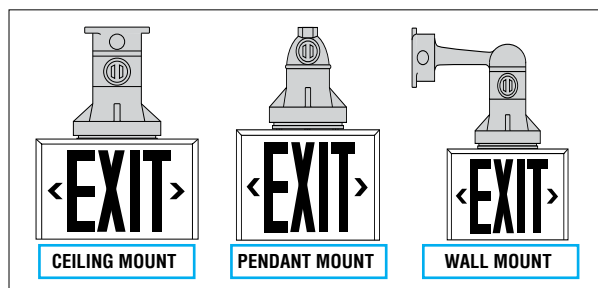

EXTERNAL SPECIFICATIONS

The SICURA housings are constructed from corrosion resistant, heavy-duty cast aluminum. Fixture mounting must be specified as either ceiling mount, wall mount or pendant mount. Exit sign faceplates and frame are constructed from durable 20 gauge steel, standard with a grey baked powder coat finish. Available in custom epoxy-based powder coat finishes (please specify). Single or double face versions must be specified. Exact dimensions will vary depending on the mounting configuration.

ELECTRICAL SPECIFICATIONS

The SICURA is configured with a high-output LED lamp in either 4W 12-24VDC or 5W 120VAC. Consult factory for 6VDC lamp.

TEMPERATURE CODES

TEMPERATURE CODES CLASS I, DIV. 1		
Lamp	4 Watt LED	5 Watt LED
T Code	T6	T6
TEMPERATURE CODES CLASS I, DIV. 2		
Lamp	4 Watt LED	5 Watt LED
T Code	T4A	T4A

TRANSFER PANEL - ORDERING GUIDE

If you require your exit to be illuminated under both AC and DC conditions, you will require a transfer panel. See chart below:

SERIES	AC	DC	WATTAGE	ENCLOSURE
XPTP	120VAC	12VDC 24VDC	25W 50W	HDZ - Hazardous (Blank) Non-Hazardous

EXAMPLE: XPTP-120VAC-12VDC-25W-HDZ

DESCRIPTION: Transfer panel with Hazardous Location enclosure

HAZARDOUS CODE CHART

LOCATION	CODE
Class I, Division 1, Group B	C1D1GB
Class I, Division 1, Group C & D	C1D1GCD
Class I, Division 2, Group A, B, C & D	C1D2GABCD
Class II, Division 1, Group E, F & G	C2D1GEFG
Class II, Division 2, Group E, F & G	C2D2GEFG
Class III, Divisions 1 & 2	C3D12

ORDERING GUIDE

SERIES	HAZARD CODE	FACE#	MOUNTING	LAMP	OPTIONS
HDZ-E (Exit) HDZ-S (Sortie)	See hazard chart	1EX (Single face exit) 2EX (Double face exit)	C (Ceiling mount) W (Wall mount) P (Pendant mount)	4W (12-24VDC) 5W (120VAC)	SW (Special wording) CC (Custom colour)

NOTE: *C1D1 G, C, D only