



# STELLA B6L COMBO


Steel LED Combo

Project Name: \_\_\_\_\_ Model Number: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

## FEATURES & BENEFITS

- Wall, ceiling or end mounting
- Field removable chevrons
- High-output LED technology
- 20 gauge steel housing
- Up to 55W lamps
- Up to 6V-50W or 12V-150W or 24-144W capacity
- High-efficiency two stage charger
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

## DIMENSIONS

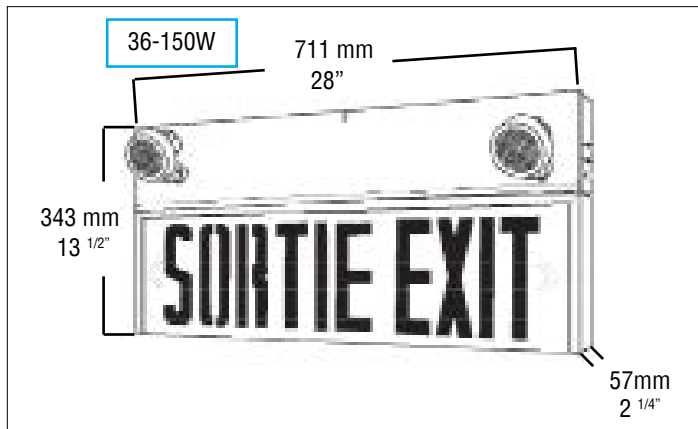

## EXTERNAL SPECIFICATIONS

The STELLA B6L COMBO is constructed from durable 20 gauge steel with standard white baked powder coat finish. Available in custom finishes (please specify). Single, double or universal face versions must also be specified. Universal mounting pattern and key hole slots are stamped into the backplate. Removable chevron arrows are standard on each fixture. Standard external LED status indicators and push button test switch. Heads are molded from high impact thermoplastic in a matching colour; two SR PAR18 9W standard.

## INTERNAL SPECIFICATIONS

SELF-POWERED: Standard versions use a valve regulated, sealed lead-acid battery to provide the emergency lighting duration for 30 minutes. LED versions standard 120/347V input.

## BATTERY TECHNOLOGY

The STELLA B6L COMBO is designed with a maintenance free, valve regulated sealed lead-acid battery providing emergency lighting for 30 minute duration. Recharge time of the battery is 24 hours.

LAMP SELECTION	6V	12V	12V – 24V
Composite Tungsten	7.2, 9W	9, 12, 18W	N/A
Quartz (Q)	12W	12, 20 (55W PAR36 only)	N/A
MR16 (SR or BTMR)	N/A	20, 35, 50W	N/A
LED-MR16 (SR or BTMR)	5, 7W	2, 5, 7W	5, 7W
LED Module	3, 4W	3, 4W	N/A

\* MR16 max 12W in SR head

## MODEL RATING GUIDE

MODEL	VOLTAGE (OUTPUT)	WATTAGE RATING 30MIN
6-36	6	36
6-50	6	50
12-36	12	36
12-72	12	72
12-90	12	90
12-150	12	150
24-144	24	144

## ORDERING GUIDE

SERIES	WATTS	LIGHT SOURCE	LETTER COLOUR	FACE#	MOUNTING	HEADS	LAMP	OPTIONS
SL-ES-B6L (Exit/Sortie) SL-SE-B6L (Sortie/Exit)	See Model Rating Guide	L (LED)	R (Red)	1 (Single) 2 (Double) U (Universal)	M (Universal) E (End)	0 (None) 1SR (PAR18 small, one head) 2SR (PAR18 small, two heads) 1LR (PAR36 large, one head) 2LR (PAR36 large, two heads) BTMR1 (MR16, one head) BTMR2 (MR16, two heads)	See lamp selection	CC (Custom colour - specify) 1TD (Time delay-specify 5,10,20mins) WG (Wireguard) PK12 (12" pendant kit) SW (Special wording) TP (Tamper proof screws)

NOTE: <sup>1</sup>Specify input voltage