



STELLA B6L


Steel LED Bilingual

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- Field removable chevrons
- High-output LED technology
- 20 gauge steel housing
- AC Only, Self-Powered or Universal DC
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

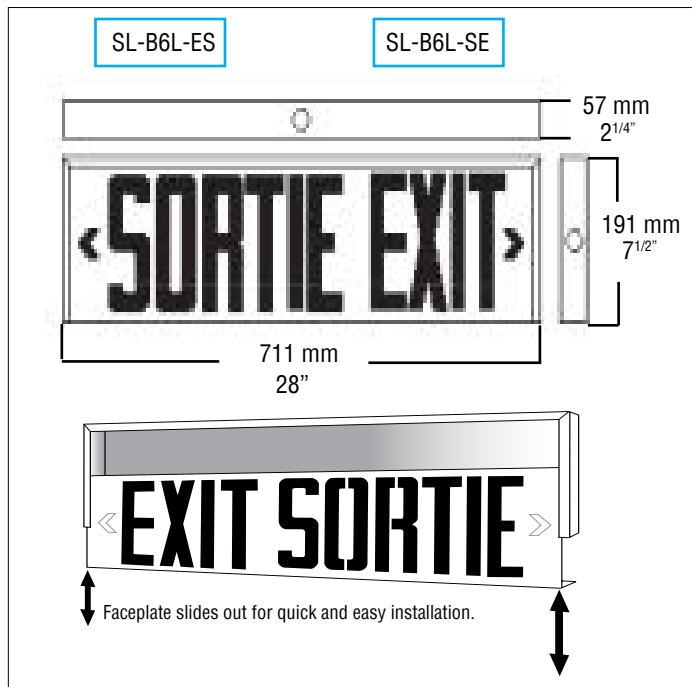

EXTERNAL SPECIFICATIONS

The STELLA-B6L is constructed from durable 20 gauge steel. The STELLA-B6L comes standard with a white baked powder coat finish. Available in custom epoxy based powder coat finishes (please specify). Single, double or universal face versions must be specified when ordering. Universal mounting pattern and keyhole slots are stamped into the backplate. Removable chevron arrows are standard on each fixture. The self-powered version comes standard with an external LED status indicator and test switch.

INTERNAL SPECIFICATIONS

AC ONLY LED: standard 120/347VAC input
 SELF-POWERED: Standard 120/347VAC input and sealed nickel-cadmium batteries to provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger and transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

The STELLA-B6L-SP is designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An extended duration 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

ORDERING GUIDE

SERIES	OPERATION	LIGHT SOURCE	LETTER COLOUR	FACE#	MOUNTING	OPTIONS
SL-B6L-ES (Exit/Sortie)	Blank (AC only) SP (Self-powered)	L (LED)	R (Red)	1 (Single) 2 (Double) U (Universal)	W (Wall mount no canopy) M (Universal mount wall, ceiling or end mount) E (End mount standard canopy & support bracket)	CC (Custom colour - specify) SW (Special wording - specify) WG (Wireguard) TP (Tamper proof screws) PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency)
SL-B6L-SE (Sortie/Exit)						

NOTE: E End mount canopy is factory installed (Customer to supply eye hook and support cable/wire)