



STELLA EXIT


Steel Exit

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- Field removable chevrons
- High-output LED technology
- 20 gauge steel housing
- AC Only, Self-Powered or Universal DC
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

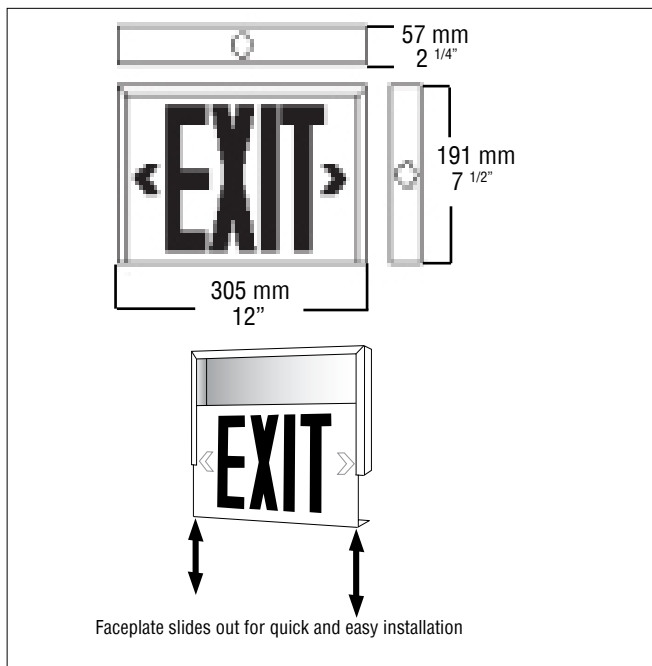

EXTERNAL SPECIFICATIONS

The STELLA is constructed from durable 20 gauge steel. The STELLA comes standard with a white baked powder coat finish. Also available in custom colours upon request. Single, double or universal face versions must be specified. Universal mounting pattern is stamped into the backplate. Removable chevron arrows are standard on each fixture. The self-powered version comes standard with an external LED status indicator and test switch.

INTERNAL SPECIFICATIONS

AC ONLY LED: standard 120/347VAC input
 SELF-POWERED: Standard 120/347VAC input and sealed Nickel-cadmium batteries to provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger and transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BELUCE AUTO-TEST (AT)

The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability, as required by the fire code.

BATTERY TECHNOLOGY

The STELLA is designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

ORDERING GUIDE

SL-E (Exit) - - - - -

SERIES	OPERATION	LIGHT SOURCE	LETTER COLOUR	FACE#	MOUNTING	OPTIONS
SL-E (Exit)	Blank (AC only) SP (Self-powered)	L (LED)	R (Red)	1 (Single) 2 (Double) U (Universal)	² W (Wall mount no canopy) M (Universal mount wall, ceiling or end mount)	CC (Custom colour - specify) SW (Special wording - specify) PK12 (12" pendant kit) AT (Auto-test, SP only) TP (Tamper proof screws) WG (Wireguard) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) ¹ 120VDC (Specify 2 or 4 wires)

NOTE: ¹With 120VAC only; ²Single face only