



STELLA RM


Steel LED Running Man

Project Name: _____ Model Number: _____
Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- High-output LED technology
- 20 gauge steel housing
- Universal AC or DC input or Self-Powered
- 120/277/347V
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

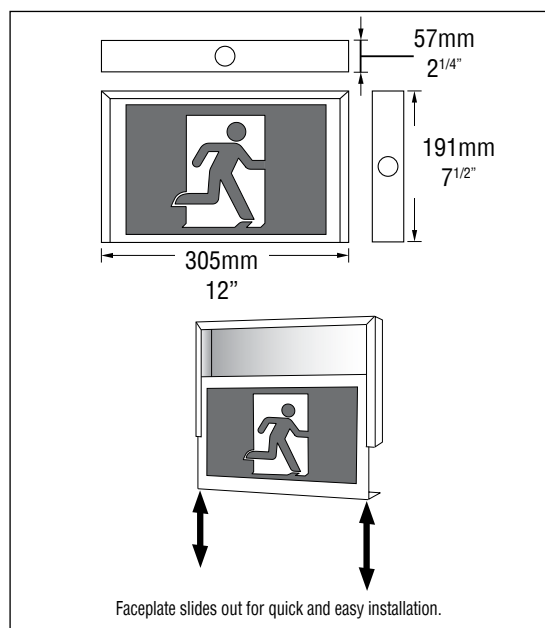

EXTERNAL SPECIFICATIONS

The STELLA is constructed from durable 20 gauge steel. The STELLA comes standard with a white baked powder coat finish. Also available in custom colours upon request. Single, double or universal face versions must be specified. Universal mounting pattern is stamped into the backplate. The self-powered version comes standard with an external LED status indicator and test switch.

BATTERY TECHNOLOGY

Designed with a maintenance free, sealed nickelcadmium battery providing a standard duration of 120 minutes. Recharge time of the battery is 24 hours.

SUPPLEMENTAL TEXT

A running man sign with supplementary "EXIT" or "SORTIE" text is also available in the STELLA model. To designate "EXIT" add "-E" to the end of the pictogram nomenclature, for "SORTIE" add "-S". For example, a sign with supplementary "EXIT" text and the indicator down to the right would have "DR-E" as it's pictogram nomenclature.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



ORDERING GUIDE

SL-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	FACE #	⁵ PICTOGRAM	MOUNTING	OPTIONS
SL-RM	ACDC (Universal AC or DC input) SP (Self-powered)	Blank (LED)	1 (Single) ¹ 2 (Double) ² U (Universal)	OLR (Universal pictograms) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	³ W (Wall mount no canopy) M (Universal mount wall, ceiling / end mount)	CC (Custom colour - specify) PK12 (12" pendant kit) TP (Tamper proof screws) ⁴ WG (Wireguard) [BLANK] (90SP - 90 min. emergency) 120SP (120 min. emergency) ⁵ AT (Auto-test, SP only) BLK (black housing) SW (Special wording) ⁶ LXN (Lexan shield) ³ 120VDC (Specify 2 or 4 wires) ⁷ FAI (Fire alarm interface - specify)

NOTE: ¹Two pictograms or OLR must be ordered - specify; ²Specify OLR pictogram; ³With 120VAC Only; ⁴Specify open/closed/6-24 VDC; ⁵For a pictogram and supplementary "EXIT" or "SORTIE" text add "-E" or "-S" after the pictogram nomenclature, size becomes 26" long; ⁶Mounting(wall/end mount) must be specified; ⁷Use wire guard accessory #50001111 & 50001112; ⁸Must specify 90min or 120min; ⁹Single face only.



STELLA RM

Steel LED Running Man

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
19001165	SL-RM-ACDC-U-OLR-M	STELLA STEEL RUNNING MAN UNIVERSAL FACE UNIVERSAL PICTOGRAMS UNIVERSAL MOUNTING WHITE FINISH 120/277/347VAC & UNIVERSAL 6-24VDC INPUT
19001166	SL-RM-SP-U-OLR-M-120SP	STELLA STEEL RUNNING MAN 120MIN SELF POWERED UNIVERSAL FACE UNIVERSAL PICTOGRAMS UNIVERSAL MOUNTING WHITE FINISH 120/277/347V INPUT