



STELLA SORTIE

Steel Sortie

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____


FEATURES & BENEFITS

- Wall, ceiling or end mounting
- Field removable chevrons
- High-output LED technology
- 20 gauge steel housing
- AC Only, Self-Powered or Universal DC
- Solid state transfer technology
- CSA 22.2 No. 141-15 Performance Certified

EXTERNAL SPECIFICATIONS

The STELLA SORTIE series is constructed from durable 20 gauge steel. The STELLA SORTIE comes standard with a white baked powder coat finish. Single, double or universal face versions may be specified. Universal mounting pattern and key hole slots are stamped into the backplate. Removable chevron arrows are standard on each fixture. The self-powered version comes standard with an external LED status indicator and test switch.

DIMENSIONS

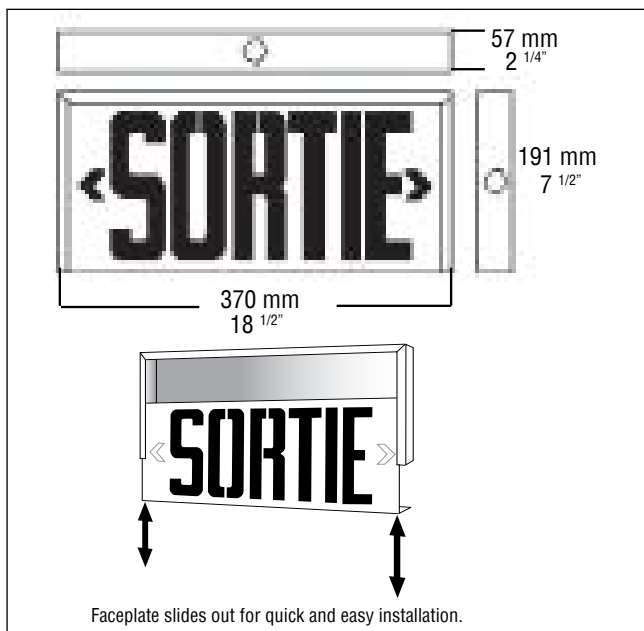

INTERNAL SPECIFICATIONS

AC ONLY LED: standard 120/347VAC input
 SELF-POWERED: Standard 120/347VAC input and sealed Nickel-cadmium batteries to provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger and transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

The STELLA SORTIE-SP is designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An extended duration 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

ORDERING GUIDE

SL-S (Sortie) - - - - -

| SERIES | OPERATION | LIGHT SOURCE | LETTER COLOUR | FACE# | MOUNTING | OPTIONS |
|---------------|--------------------------------------|--------------|---------------|-------------------------------------------|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SL-S (Sortie) | Blank (AC only) SP (Self-powered) | L (LED) | R (Red) | 1 (Single) 2 (Double) U (Universal) | W (Wall mount no canopy) M (Universal mount wall, ceiling or end mount) | CC (Custom colour - specify) SW (Special wording - specify) WG (Wireguard) TP (Tamper proof screws) PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) |