



# STELLA UNIBODY COMBO

Steel High Capacity Exit & Sortie Combo

Project Name: \_\_\_\_\_ Model Number: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_


## FEATURES & BENEFITS

- Wall, ceiling or end mounting
- Field removable chevrons
- High-output LED technology
- 20 gauge steel housing
- Up to 55W lamps
- High-capacity cabinet up to 360W
- High-efficiency two stage charger
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

## BATTERY TECHNOLOGY

The STELLA UNIBODY combo is designed with a maintenance free sealed lead-acid battery providing emergency lighting duration as specified per unit. Ni-Cd batteries are optional. Recharge time of the battery is 24 hours.

## DIMENSIONS

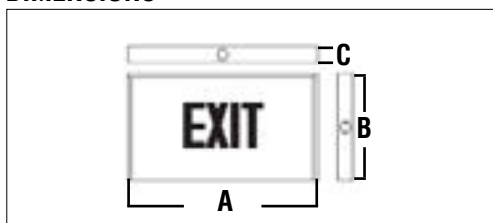

WATTAGE	A	B	C
80 - 180W	381mm (15")	241mm (9 1/2")	108mm (4 1/4")
200-360W	320mm (13")	254mm (10")	203mm (8")
80-360W (Sortie)	457mm (18")	254mm (10")	213mm (8 3/8")

LAMP SELECTION	6V	12V	24V	12V – 24V
Composite Tungsten	7.2, 9W	9, 12, 18W	9, 18 (25W, PAR36 only)	N/A
Quartz (Q)	12W	12, 20 (55W PAR36 only)	N/A	N/A
MR16 (SR or BTMR)	N/A	20, 35, 50W	N/A	N/A
LED-MR16 (SR or BTMR)	5, 7W	2, 5, 7W	5, 7W	5, 7W
LED Module	3, 4W	3, 4W	N/A	N/A
TES	N/A	5, 9, 14, 30W	5, 9, 14, 30W	N/A

\* MR16 max 12W in SR head

## ORDERING GUIDE

SERIES	WATTS	LIGHT SOURCE	LETTER COLOUR	FACE#	MOUNTING	HEADS	LAMP	OPTIONS
SLU-E (Exit) SLU-S (Sortie)	See Model Rating Guide	L (LED)	R (Red)	1 (Single) Single face only	W (Wall) C (Ceiling)	0 (None) 1SR (PAR18 small, one head) 2SR (PAR18 small, two heads) 1LR (PAR36 large, one head) 2LR (PAR36 large, two heads) BTMR1 (MR16, one head) BTMR2 (MR16, two heads) 1TESSQ (One head, HO) 2TESSQ (Two heads, HO)	See lamp selection	NC (Ni-Cd batteries, see guide) CC (Custom colour - specify) TD (10 min. time delay) WG (Wireguard) PK12 (12" pendant kit) AT (Auto-test, SP only) TP (Tamper proof screws) SM (Side mounted heads)

NOTE: <sup>1</sup>Specify AC input voltage; <sup>2</sup>Surface ceiling mount requires SM option

## EXTERNAL SPECIFICATIONS

The STELLA UNIBODY Combo is constructed from durable 20 gauge steel with standard white baked powder coat finish. Available in custom finishes (please specify). Single face version only. Universal mounting pattern and key hole slots are stamped into the backplate. Removable chevron arrows are standard on each fixture. Standard external LED status indicators and push button test switch. Heads are either molded from high impact thermoplastic (SR or LR) or die-cast aluminum (BTMR).

## INTERNAL SPECIFICATIONS

Standard versions use a valve regulated, sealed lead-acid battery to provide the emergency lighting duration as specified per unit. Standard with 120/347V input.

## BELUCE AUTO-TEST (AT)

The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability, as required by the fire code.

## MODEL RATING GUIDE

MODEL	VOLTAGE (OUTPUT)	WATTAGE RATING 30MIN
SLU-6-50-NC	6	50
SLU-6-80	6	80
SLU-6-90	6	90
SLU-6-100-NC	6	100
SLU-6-160	6	160
SLU-6-180	6	180
SLU-6-180-NC	6	180
SLU-12-90	12	90
SLU-12-100-NC	12	100
SLU-12-120	12	120
SLU-12-150	12	150
SLU-12-180	12	180
SLU-12-200	12	200
SLU-12-200-NC	12	200
SLU-12-250	12	250
SLU-12-360	12	360
SLU-24-144	24	144
SLU-24-180	24	180
SLU-24-200-NC	24	200