



# STELLA UNIBODY RM COMBO


Steel High Capacity Combo

Project Name: \_\_\_\_\_ Model Number: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

## FEATURES & BENEFITS

- Wall, ceiling or end mounting
- High-capacity cabinet up to 360W
- High-output LED technology
- Up to 55W lamps
- 20 gauge steel housing
- LED versions standard 120/347V input
- High-efficiency two stage charger
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

## DIMENSIONS

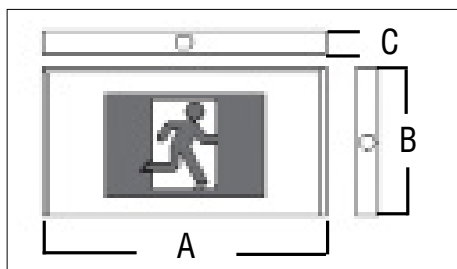

WATTAGE	A	B	C
80 - 180W	381mm 15"	241mm 9 1/2"	108mm 4 1/4"
200-360W	381mm 15"	254mm 10"	203mm 8"

## LAMP SELECTION

	6V	12V	24V	12V – 24V
Composite Tungsten	7.2, 9W	9, 12, 18W	9, 18 (25W, PAR36 only)	N/A
Quartz (Q)	12W	12, 20 (55W PAR36 only)	N/A	N/A
MR16 (BTMR or SR)	N/A	20, 35, 50W	N/A	N/A
LED MR16 (BTMR or SR)	5, 7W	2, 5, 7W	5, 7W	5, 7W
LED Module	3, 4W	3, 4W	N/A	N/A
TES	N/A	5, 9, 14, 30W	5, 9, 14, 30W	N/A

NOTE: MR16 max 12W in SR head

## ORDERING GUIDE

SLU- RM- - - - - - -

SERIES	WATTS	LIGHT SOURCE	<sup>2</sup> FACE#	PICTOGRAM	MOUNTING	HEADS	LAMP	OPTIONS
SLU- RM	See model rating guide	L (LED)	1 (Single)	OLR (Universal pictograms) O (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	<sup>2</sup> W (Wall) C (Ceiling)	0 (None) 1SR (PAR18 small, one head) 2SR (PAR18 small, two heads) 1LR (PAR36 large, one head) 2LR (PAR36 large, two heads) 1BTMR (MR16, one head) 2BTMR (MR16, two heads) 1TESSQ (One head, HO) 2TESSQ (Two heads, HO)	See lamp selection	NC (Ni-Cd batteries) CC (Custom colour - specify) TD (10 min. time delay) WG (Wireguard) PK12 (12" pendant kit) AT (Auto-test, SP only) TP (Tamper proof screws) SM (Side mount heads) SW-OL (RM no indicator, left)

NOTE: <sup>1</sup>Specify AC input voltage; <sup>2</sup>Single face only

## EXTERNAL SPECIFICATIONS

The STELLA UNIBODY combo is constructed from durable 20 gauge steel with standard white baked powder coat finish. Available in custom finishes (please specify). Single face version only. Universal mounting pattern and key hole slots are stamped into the backplate. Standard external LED status indicators and push button test switch. Heads are molded from high impact thermoplastic in a matching colour; SR PAR18 standard.

## BATTERY TECHNOLOGY

The STELLA UNIBODY combo is designed with a maintenance free, valve regulated sealed lead-acid battery providing emergency lighting duration as specified per unit. Ni-Cd batteries are optional. Recharge time of the battery is 24 hours.

## UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



## MODEL RATING GUIDE

MODEL	VOLTAGE (OUTPUT)	WATTAGE RATING 30MIN	120MIN
SLU-RM-6-80	6	80	24
SLU-RM-6-90	6	90	27
SLU-RM-6-100-NC	6	100	35
SLU-RM-6-180-NC	6	180	60
SLU-RM-12-90	12	90	27
SLU-RM-12-100-NC	12	100	35
SLU-RM-12-120	12	120	36
SLU-RM-12-150	12	150	45
SLU-RM-12-180	12	180	54
SLU-RM-12-200	12	200	60
SLU-RM-12-200-NC	12	200	65
SLU-RM-12-250	12	250	75
SLU-RM-12-360	12	360	108
SLU-RM-24-144	24	144	43
SLU-RM-24-180	24	180	54
SLU-RM-24-200-NC	24	200	65