



# STELLALUCE COMBO RM

Steel Running Man LED Combo

Project Name: \_\_\_\_\_ Model Number: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

## FEATURES & BENEFITS

- Wall, ceiling or end mounting
- 3 lenses for different light distribution
- High-output LED technology with constant light output level
- Integrated test button & LED indicator
- 2-wire universal AC input of 120-347 VAC
- 4 x 2.5W LEDs 4000K
- 20 gauge steel with a die-cast aluminum combo housing
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified


## LED TECHNOLOGY

The STELLALUCE is illuminated with four 2.5W Samsung LEDs. The STELLALUCE delivers up to 919 lm. Each pair of LEDs are laid out in parallel on the LED module so if one pair fails, the other will remain illuminated. A high-efficiency LED driver is used to maintain a constant output current to all LEDs. The LEDs are rated for >54,000 hours at L80.

## BATTERY TECHNOLOGY

The STELLALUCE comes standard with a Ni-Cd battery pack that provides a minimum of 30 minute emergency duration. Optional 90 or 120 minute run time is available.

## DIMENSIONS

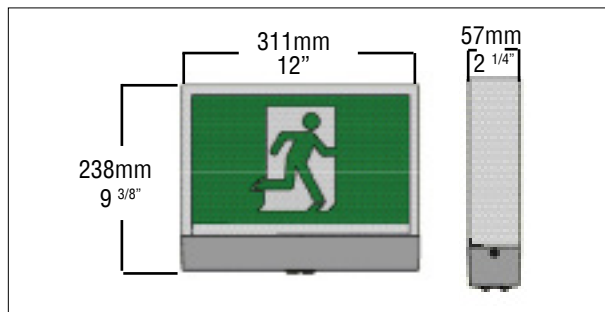

## BELUCE AUTO-TEST (AT)

The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two full discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability. A manual Test feature is included when the Auto-test option is selected. The manual test will run a 30 second, 15 minute or 90 minute test by pressing the correct sequence of the test switch.

## UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



## AC INPUT RATINGS

VOLTAGE (VAC)	WATTAGE (W)	RATED CURRENT (A)
120/277/347	6.0/6.5/8.6	0.15/0.075/0.10

## ORDERING GUIDE


SL-RM-PL - - - - -

SERIES	WATTS	LIGHT SOURCE	FACE#	PICTOGRAM	MOUNTING	OPTIONS
SL-RM-PL	12-10	L (LED)	1 (Single) 12 (Double) 2U (Universal)	OLR (Universal pictograms) 0 (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall) C (Ceiling) M (Universal mount)	CC (Custom colour - specify) WG (Wireguard) PK12 (12" pendant kit) AT (Auto-test) TP (Tamper proof screws) SW-OL (RM no indicator, left) 90MIN (90 min. run time) 120MIN (120 min. run time)


NOTE: \*Two pictograms or OLR must be specified; \*OLR pictograms will be provided

## LENS DISTRIBUTION PATTERNS


Ceiling Symmetrical

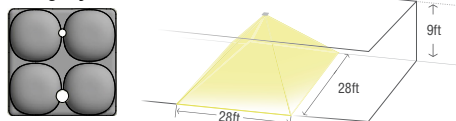

Wall Forward

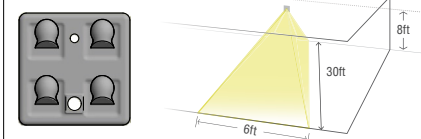

Wall Wide

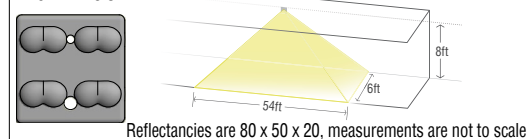

Reflectancies are 80 x 50 x 20, measurements are not to scale