



# VE2 RM


Thermoplastic Running Man

Project Name: \_\_\_\_\_ Model Number: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_

### FEATURES & BENEFITS

- Wall, ceiling or end mounting
- High-output LED technology
- Thermoplastic housing
- Self-powered models provide 120 minute run time
- Operating temperature: 5°C to 30°C
- CSA 22.2 No.141-15 Performance Certified

### DIMENSIONS

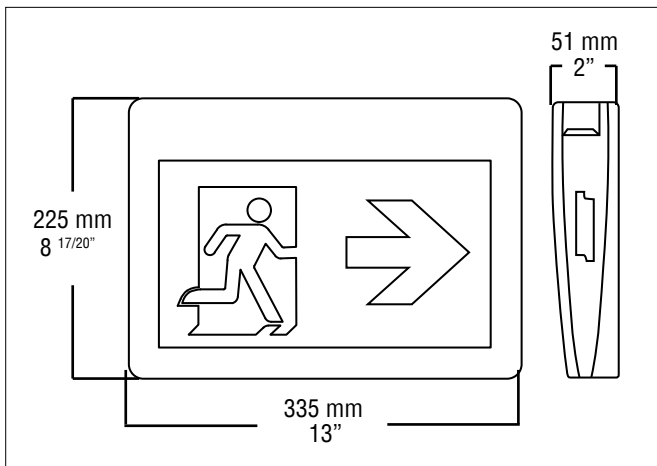

### EXTERNAL SPECIFICATIONS

The VE2 is constructed from durable corrosion and flame resistant thermoplastic. The universal VE2 comes standard with a mounting canopy, specified pictograms, one backplate and all mounting hardware. The unit comes standard finished in white. An external LED status indicator and test switch is standard on all self-powered models. 120/347V is standard.

### INTERNAL SPECIFICATIONS

AC ONLY and SELF-POWERED: standard 120/347VAC input, Self-powered versions use sealed nickel-cadmium batteries to provide a minimum 120 minutes of emergency duration. Electronic cut-off circuit prevents over-discharge. VE2 signs configured for AC/DC operation feature a universal 2 wire DC input; 6V DC - 24V DC. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

### BATTERY TECHNOLOGY

Designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 120 minutes. Recharge time of the battery is 24 hours.

### UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



### ORDERING GUIDE

VE2-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	FACE#	PICTOGRAM	MOUNTING	OPTIONS
VE2-RM	Blank (AC only) SP (Self-powered)	L (LED)	U (Universal)	OLR (Universal pictograms)	M (Universal wall, ceiling or end mount)	WG (Wireguard) UDC (6 - 24VDC)

### PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
19001008	VE2-RM-L-U-OLR-M	VE2 PLASTIC RUNNING MAN NO INDICATOR,LEFT & RIGHT INDICATORS A/C ONLY WHITE LED UNIVERSAL FACE UNIVERSAL MOUNT 120347V INPUT **2 LED BOARDS**
19001056	VE2-RM-L-U-OLR-M- UDC	VE2 PLASTIC RUNNING MAN NO INDICATOR,LEFT & RIGHT INDICATORS WHITE LED UNIVERSAL FACE UNIVERSAL MOUNT 120347V INPUT C/W UDC **2 LED BOARDS**
19001009	VE2-RM-SP-L-U-OLR-M	VE2 PLASTIC RUNNING MAN NO INDICATOR,LEFT & RIGHT INDICATORS S/P WHITE LED UNIVERSAL FACE UNIVERSAL MOUNT 120347V INPUT 120 MIN **2 LED BOARDS**