



VERDE RM

Thermoplastic Running Man

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- High-output LED technology
- Thermoplastic housing
- Attractive low profile design
- Suitable for indoor installations
- CSA 22.2 No.141-15 Performance Certified

EXTERNAL SPECIFICATIONS

The VERDE is constructed from durable corrosion and flame resistant thermoplastic. The universal VERDE comes standard with a mounting canopy, specified pictograms, one backplate and all mounting hardware. The unit comes standard finished in white. An external LED status indicator and test switch is standard on all self-powered models.

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED: standard 120/347VAC input. Self-powered versions use sealed nickel-cadmium batteries to provide a minimum 90 minutes of emergency duration. Electronic cut-off circuit prevents over-discharge. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

The VERDE series is designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

BELUCE AUTO-TEST (AT)


The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 90 minute discharge tests, 48 hours apart. This tests both full battery capacity and recharge capability, as required by the fire code.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



DIMENSIONS

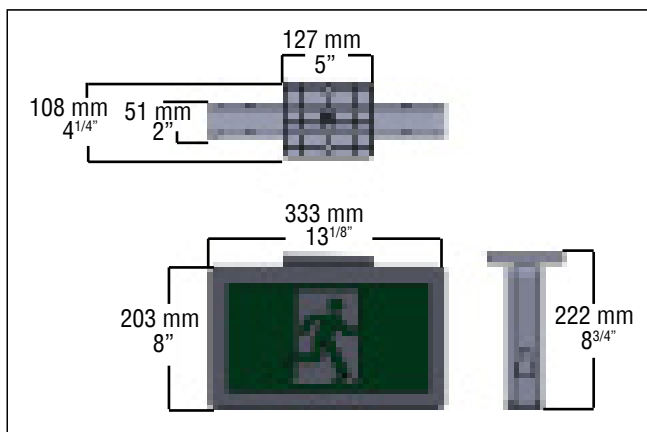

ORDERING GUIDE

VE-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	FACE#	PICTOGRAM	MOUNTING	OPTIONS
VE-RM	Blank (AC only) SP (Self-powered)	L (LED)	1 (Single) 2 (Double) U (Universal)	OLR (Universal pictograms) O (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	M (Universal mount wall, ceiling or end mount)	UDC (Universal 6-24VDC) BLK (Black Housing) WG (Wireguard) 120SP(120 minute emergency) 3120VDC (Specify 2 or 4 wires) AT (Auto-test, SP only) SW-OL (RM no indicator, left)

NOTE: ¹Specify OLR pictogram; ²Two pictograms or OLR must be ordered - specify; ³With 120VAC only