

IES INDOOR REPORT

PHOTOMETRIC FILENAME : OVVIO COMBO RM_TESTA SQ_12V_5W.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] T191011051
[TESTDATE] 2019-10-11
[TESTLAB] Dongguan Hongnuo Product Testing Service Co., Ltd.
[ISSUEDATE] 2019-10-11 09:21:59
[MANUFAC] BELUCE CANADA INC.
[LUMINAIRE] OVVIO COMBO RM_TESTA SQ_12V_5W
[LUMCAT] OVVIO COMBO RM_TESTA SQ_12V_5W
[LAMP] LED
[_TOTALLUMINAIRELUMENS] 642.1
[_LAMPPOSITION] 0,0

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	653
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	132
Total Luminaire Watts	4.9421
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.42
Spacing Criterion (90-270)	0.40
Spacing Criterion (Diagonal)	0.46
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.30 ft
Luminous Width (90-270)	0.30 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	7922	8233	7543
55	6422	7185	6518
65	5700	6234	5720
75	4986	4991	4561
85	4058	3962	3030

IES INDOOR REPORT
PHOTOMETRIC FILENAME : OVVIO COMBO RM_TESTA SQ_12V_5W.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>	<u>202.5</u>
0	1959.76	1959.76	1959.76	1959.76	1959.76	1959.76	1959.76	1959.76	1959.76	1959.76
5	1780.15	1795.07	1794.33	1770.80	1733.67	1698.44	1684.01	1693.07	1725.00	1761.52
10	1222.01	1244.74	1238.99	1191.89	1122.89	1052.46	1018.88	1031.92	1081.34	1154.35
15	678.87	741.24	771.13	751.93	689.31	630.19	601.34	612.49	658.58	723.73
20	429.81	479.96	523.18	522.57	476.16	432.76	416.82	425.24	460.35	508.09
25	286.71	305.68	324.70	324.05	303.53	280.74	275.38	280.60	299.05	320.51
30	180.63	183.08	187.19	182.28	171.18	163.99	163.80	166.47	173.80	184.53
35	105.31	105.00	104.73	102.43	97.83	93.40	92.04	92.83	94.93	96.81
40	63.53	64.10	64.68	63.23	60.22	57.51	55.36	54.77	55.85	56.50
45	46.88	47.53	48.72	47.50	44.64	42.34	40.36	39.79	40.12	41.07
50	38.67	40.32	42.57	41.76	38.26	36.15	35.53	34.06	33.79	34.32
55	30.83	33.06	34.49	35.08	31.29	29.66	27.38	28.30	27.74	29.07
60	24.82	27.80	27.77	28.35	25.51	24.22	21.42	22.91	21.93	24.77
65	20.16	22.31	22.05	22.52	20.23	18.96	16.81	17.98	16.69	18.01
70	15.61	16.37	16.22	15.52	14.95	13.75	12.35	12.41	11.90	12.11
75	10.80	11.25	10.81	10.23	9.88	9.11	8.06	7.73	7.37	7.59
80	6.41	6.56	6.35	5.88	5.48	4.87	4.23	3.72	3.58	3.48
85	2.96	3.04	2.89	2.55	2.21	1.74	1.31	0.97	0.75	0.70
90	0.49	0.55	0.49	0.32	0.13	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
165	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04
170	0.05	0.05	0.04	0.04	0.06	0.06	0.06	0.06	0.06	0.06
175	0.04	0.04	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.04
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles **Horizontal Angles**

	<u>225.0</u>	<u>247.5</u>	<u>270.0</u>	<u>292.5</u>	<u>315.0</u>	<u>337.5</u>	<u>360.0</u>
0	1959.76	1959.76	1959.76	1959.76	1959.76	1959.76	1959.76
5	1786.04	1792.80	1783.72	1768.72	1759.41	1764.96	1780.15
10	1218.36	1228.12	1209.00	1188.06	1185.15	1198.58	1222.01
15	756.17	729.48	669.73	624.17	633.31	631.76	678.87
20	520.91	491.02	434.43	402.71	394.44	400.37	429.81
25	327.10	313.92	290.62	277.09	272.63	274.60	286.71
30	191.39	189.69	182.28	179.76	179.58	178.55	180.63
35	99.81	101.26	102.03	101.99	103.44	104.41	105.31
40	58.66	59.80	61.22	61.08	62.78	63.24	63.53
45	42.71	43.53	43.81	44.09	44.56	45.81	46.88
50	35.07	35.89	35.83	36.53	36.92	38.04	38.67
55	28.89	29.74	28.46	29.44	29.75	31.17	30.83
60	23.38	24.58	22.24	23.67	22.26	24.76	24.82

IES INDOOR REPORT
PHOTOMETRIC FILENAME : OVVIO COMBO RM_TESTA SQ_12V_5W.IES

CANDELA TABULATION - (Cont.)

65	17.56	18.99	17.99	19.15	17.78	20.31	20.16
70	12.75	13.35	13.18	13.65	13.57	14.93	15.61
75	7.65	8.34	8.70	9.19	9.46	10.08	10.80
80	3.65	4.04	4.59	4.98	5.49	5.98	6.41
85	0.84	1.10	1.41	1.81	2.21	2.59	2.96
90	0.00	0.00	0.00	0.00	0.11	0.34	0.49
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.02	0.02	0.01	0.01	0.01	0.01	0.01
165	0.05	0.04	0.03	0.03	0.03	0.03	0.03
170	0.06	0.06	0.05	0.05	0.05	0.05	0.05
175	0.04	0.04	0.05	0.05	0.04	0.04	0.04
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : OVVIO COMBO RM_TESTA SQ_12V_5W.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	351.98	N.A.	53.90
0-30	491.37	N.A.	75.20
0-40	559.08	N.A.	85.60
0-60	622.03	N.A.	95.20
0-80	650.82	N.A.	99.60
0-90	653.20	N.A.	100.00
10-90	504.42	N.A.	77.20
20-40	207.11	N.A.	31.70
20-50	242.77	N.A.	37.20
40-70	81.94	N.A.	12.50
60-80	28.79	N.A.	4.40
70-80	9.80	N.A.	1.50
80-90	2.38	N.A.	0.40
90-110	0.04	N.A.	0.00
90-120	0.04	N.A.	0.00
90-130	0.04	N.A.	0.00
90-150	0.04	N.A.	0.00
90-180	0.06	N.A.	0.00
110-180	0.01	N.A.	0.00
0-180	653.26	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	148.78
10-20	203.19
20-30	139.39
30-40	67.72
40-50	35.66
50-60	27.29
60-70	18.99
70-80	9.80
80-90	2.38
90-100	0.04
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.01
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : OVVIO COMBO RM_TESTA SQ_12V_5W.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76
5	94	86	80	76	92	85	79	76	83	78	75	81	77	74	80	76	74	72
6	90	81	76	71	88	80	75	71	79	74	71	78	73	70	76	73	70	68
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	66	65
8	83	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	64	62
9	79	71	65	62	78	70	65	61	69	65	61	68	64	61	68	64	61	60
10	77	68	62	59	76	67	62	59	67	62	59	66	62	59	65	61	58	57

IES INDOOR REPORT

PHOTOMETRIC FILENAME : OVVIO COMBO RM_TESTA SQ_12V_5W.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise

X=2H	Y=2H	14.7	15.8	15.1	16.1	16.5	14.8	15.9	15.2	16.2	16.5
	3H	16.4	17.3	16.7	17.7	18.0	16.3	17.2	16.7	17.6	17.9
	4H	16.9	17.8	17.3	18.2	18.6	16.8	17.7	17.2	18.0	18.4
	6H	17.3	18.2	17.8	18.5	18.9	17.1	17.9	17.5	18.3	18.7
	8H	17.5	18.2	17.9	18.6	19.0	17.2	18.0	17.6	18.3	18.8
	12H	17.6	18.3	18.0	18.7	19.1	17.2	18.0	17.6	18.3	18.8

UGR Viewed Endwise


4H	2H	15.2	16.1	15.6	16.4	16.8	15.2	16.1	15.6	16.5	16.8
	3H	17.0	17.7	17.4	18.2	18.6	16.9	17.6	17.3	18.0	18.4
	4H	17.7	18.4	18.2	18.8	19.2	17.5	18.1	17.9	18.6	19.0
	6H	18.2	18.8	18.7	19.3	19.7	17.9	18.5	18.4	18.9	19.4
	8H	18.4	18.9	18.9	19.4	19.9	18.0	18.6	18.5	19.0	19.5
	12H	18.5	19.0	19.0	19.5	20.0	18.1	18.6	18.6	19.0	19.5

8H	4H	17.9	18.4	18.4	18.9	19.3	17.6	18.2	18.1	18.6	19.1
	6H	18.5	18.9	19.0	19.5	19.9	18.2	18.6	18.7	19.1	19.6
	8H	18.8	19.2	19.3	19.7	20.2	18.4	18.7	18.9	19.2	19.7
	12H	19.0	19.3	19.5	19.8	20.4	18.5	18.8	19.0	19.3	19.9

12H	4H	17.9	18.3	18.4	18.8	19.3	17.6	18.1	18.1	18.6	19.1
	6H	18.6	18.9	19.1	19.4	19.9	18.2	18.6	18.7	19.0	19.6
	8H	18.8	19.2	19.4	19.7	20.2	18.4	18.7	18.9	19.2	19.8

Maximum UGR = 20.4

POLAR GRAPH

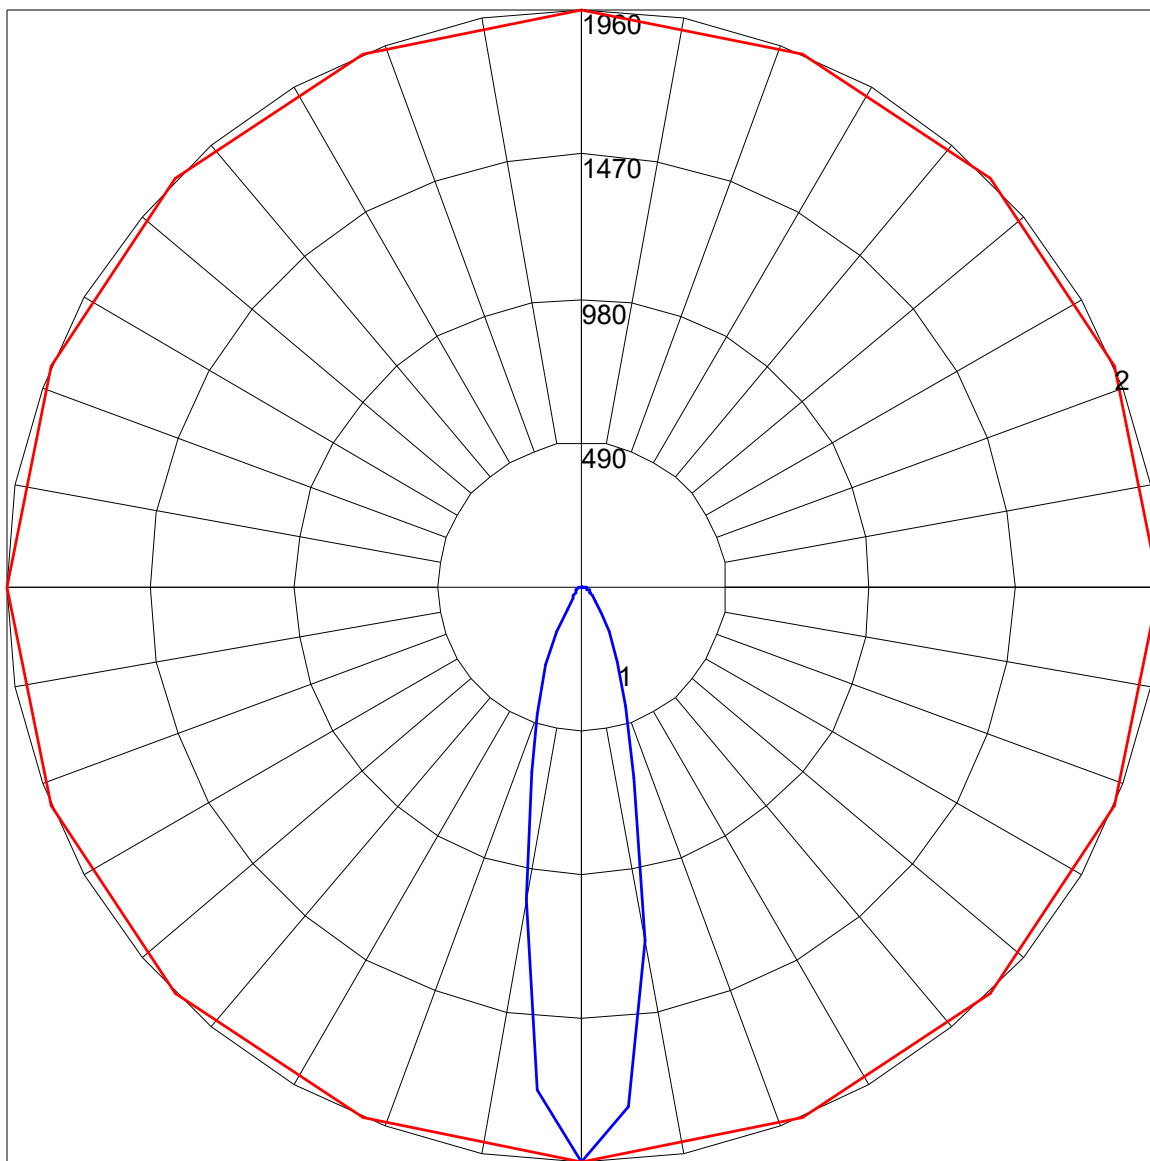

Maximum Candela = 1959.76 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)