


ACCIAIO® LED

BX920

EACH MODEL NUMBER CONSISTS OF THE FOLLOWING:
SERIES / LENGTH / OPERATION / LUMENS / COLOUR TEMP. /
INPUT

SERIES:	BX920LED
LENGTH:	4FT
OPERATION:	HT (AC ONLY) / 0-10V DIMMING SA (EM BACKUP)
LUMENS:	LO (50W), HO (80W)
COLOUR TEMP.:	3000K, 4000K, 5000K
INPUT:	120-277V; 347-480V

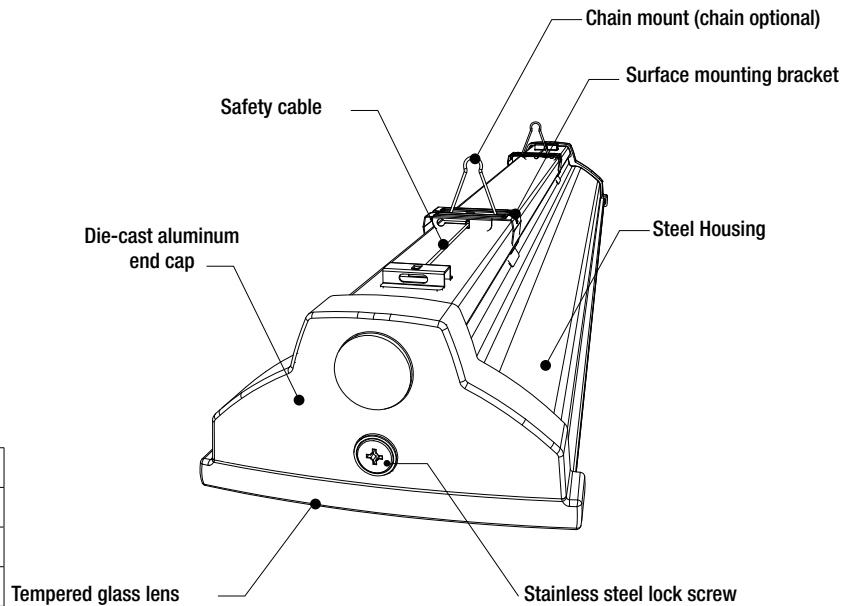

IMPORTANT SAFEGUARDS


When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

1. Do not let power cords touch hot surfaces.
2. Do not mount near gas or electric heaters.
3. Equipment should be mounted in locations and at heights where unauthorized personnel will not readily subject it to tampering.
4. The use of accessory equipment not recommended by BeLuce Canada, may cause an unsafe condition, and will void the warranty.
5. Do not use this equipment for other than its intended purpose.
6. Servicing of this equipment should be performed by qualified service personnel.


SAVE THESE INSTRUCTIONS!

First make sure power is turned off before starting the installation!

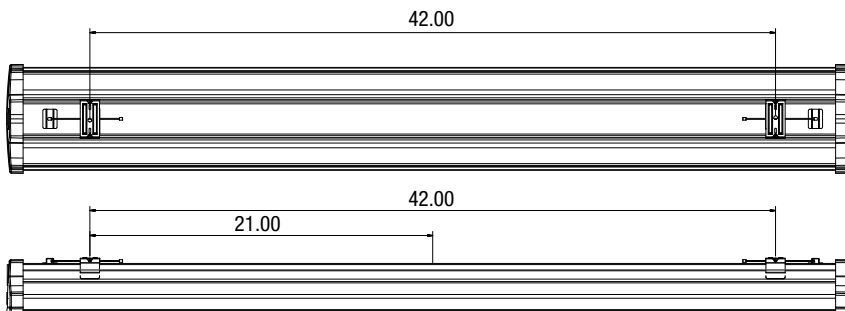


WARNING ⚠

No user serviceable parts. Refer service to a qualified service technician. Read instructions prior to installing and/or operating this device. Installation should be performed by a licensed electrician/installer in accordance with local codes.

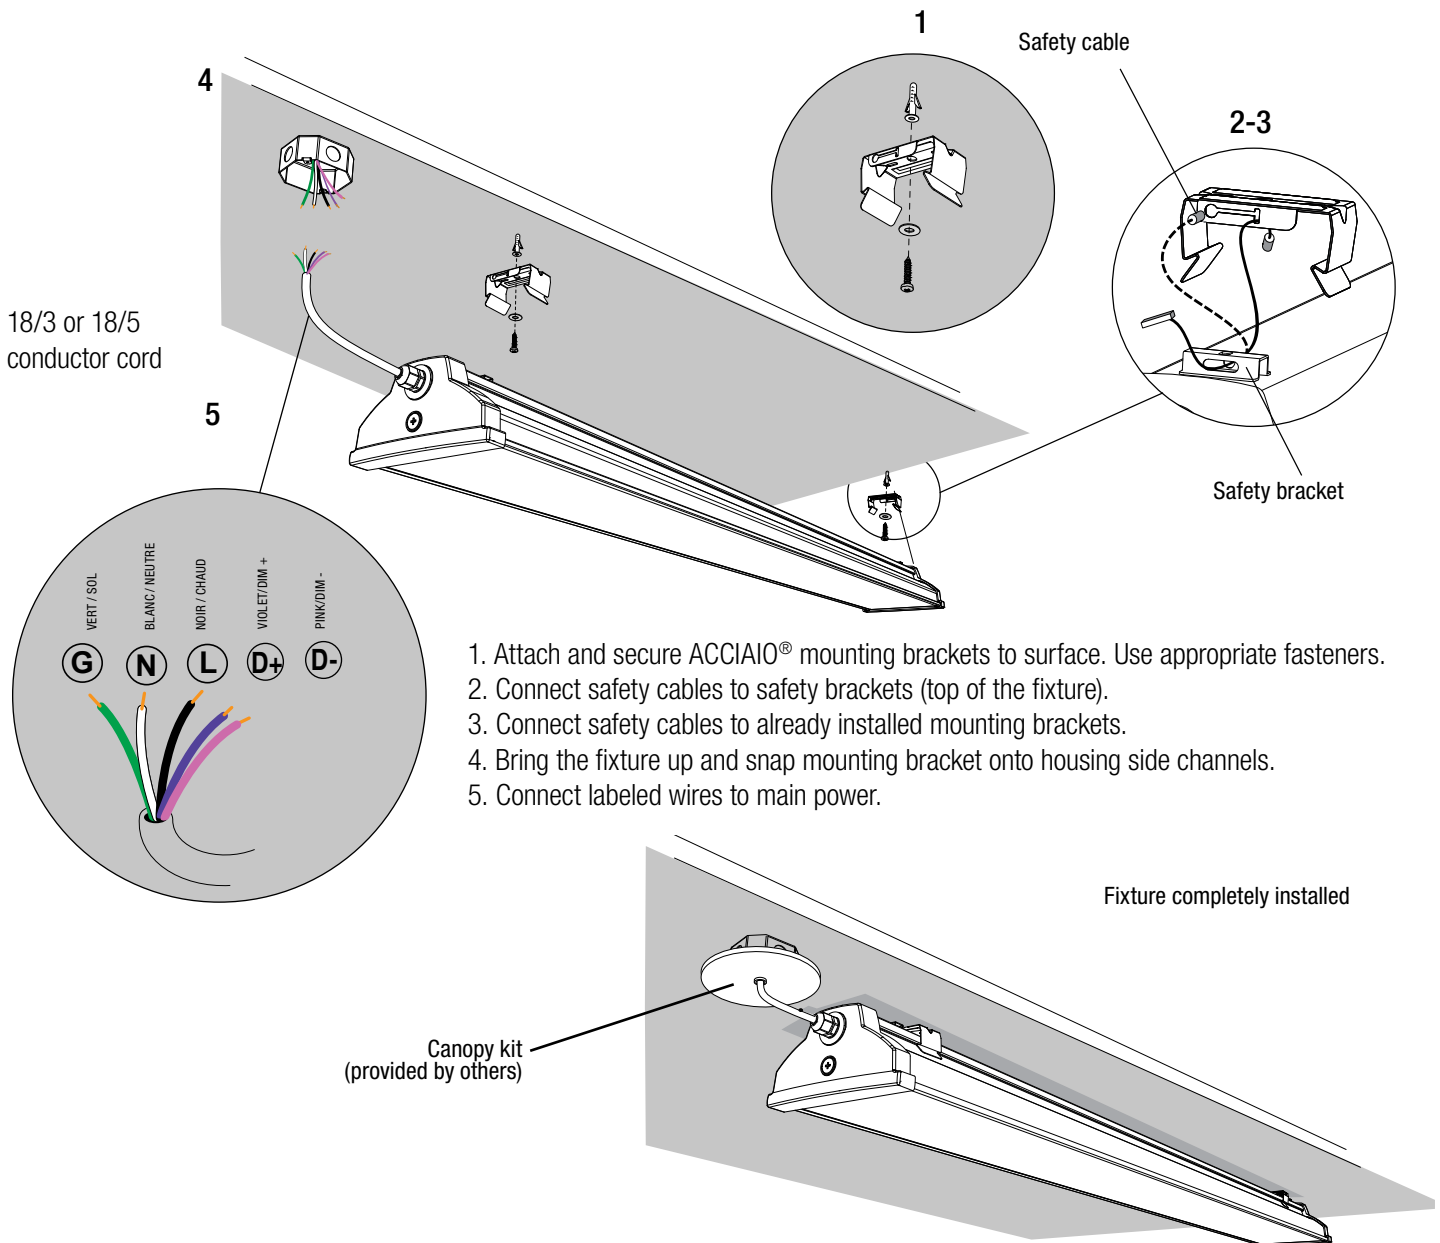



0-10V dimming wires must be run from a different conduit out of the J-Box.

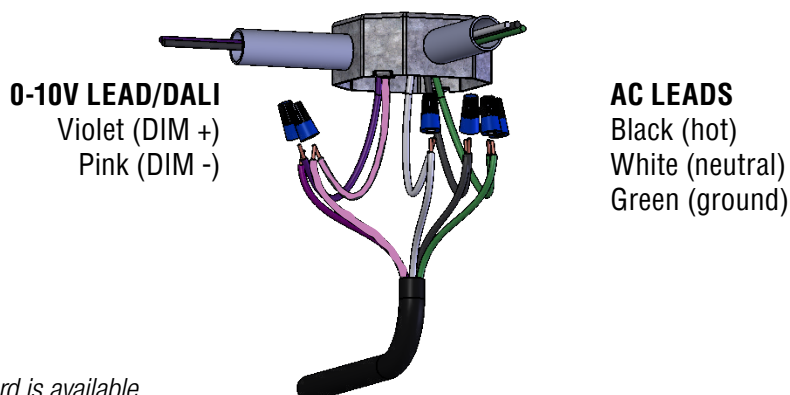

Note: Optional 3-conductor cord is available (contact factory).



Aircraft Cable Mounting

1. Attach the cable glider to the surface mounting clip using provided lock nut as shown.
2. Snap the mounting clip assembly onto the housing
3. Thread the A/C cable through the cable glider as shown. (push top sleeve of cable glider to release lock and adjust level)
4. Connect safety cables to each safety bracket and mounting bracket.

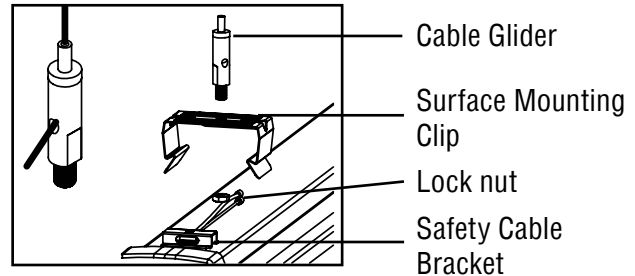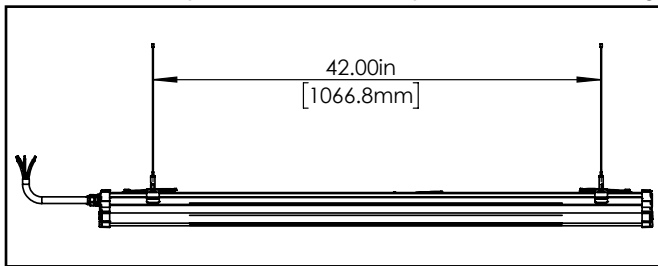



Chain Mounting

1. Insert the hook clip through the loop of the chain (chain by others)
2. Attach the hook clip onto the holes on the top of the surface mounting clip as shown
3. Snap the mounting clip assembly onto the housing as shown
4. Connect safety cables to each safety bracket and mounting bracket.

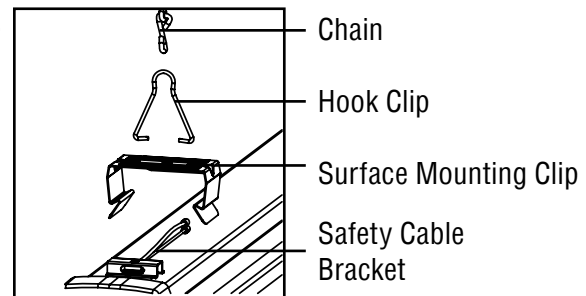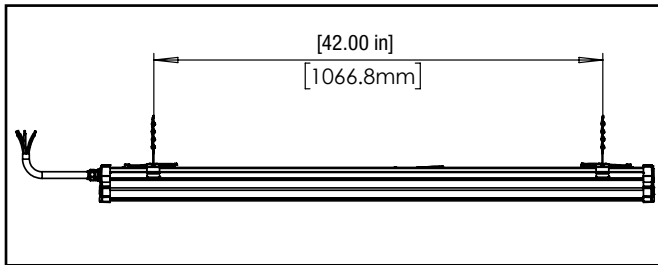

Pendant Kit

1. Attach the stem adaptor cap to the surface mounting clip using provided lock nut as shown.
2. Snap the mounting clip assembly onto the housing.
3. Attach stem adaptor & stem to the stem end-cap
4. Connect safety cables to each safety bracket and mounting bracket.

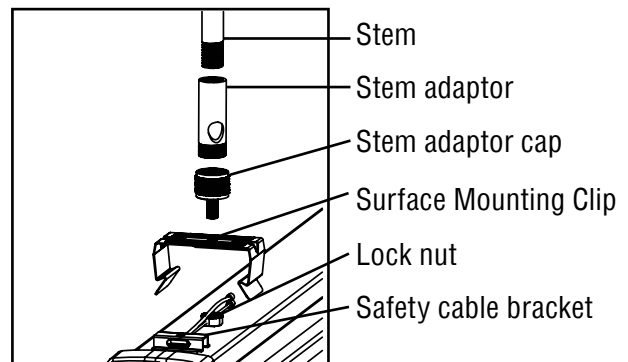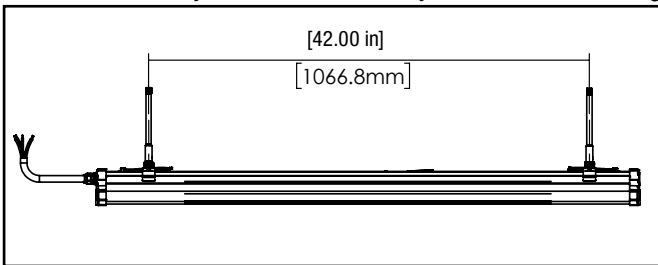

Pivot Mounting

1. Attach the Pivot brackets together as shown.
2. Attach the Pivot assembly to mounting bracket as shown.
3. Mount the Pivot assembly to the desire location on wall/ceiling
4. Snap the fixture onto the mounting brackets.
5. Connect safety cables to each safety bracket and mounting bracket.

