



PREZZO RM

Steel LED Running Man

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Universal mounting: ceiling, wall and end mount
- High-output LED technology
- 20-gauge steel housing
- Universal AC/DC or Self-Powered
- Self-Powered: Ni-Cad battery, 120 minutes emergency duration
- 120-347V Input
- Universal Face and pictograms
- Meets requirements of ICES-005
- Certified CSA 22.2 No. 141 & Energy Efficiency CAN/CSA-C860


EXTERNAL SPECIFICATIONS

The PREZZO RM is constructed from durable 20 gauge steel. The PREZZO RM comes standard with a white baked powder coat finish. Universal mounting pattern is stamped into the backplate. The self-powered version comes standard with an external LED status indicator and test switch.

BATTERY TECHNOLOGY

Designed with a maintenance free, sealed nickelcadmium battery providing a standard duration of 120 minutes. Recharge time of the battery is 24 hours.

DIMENSIONS

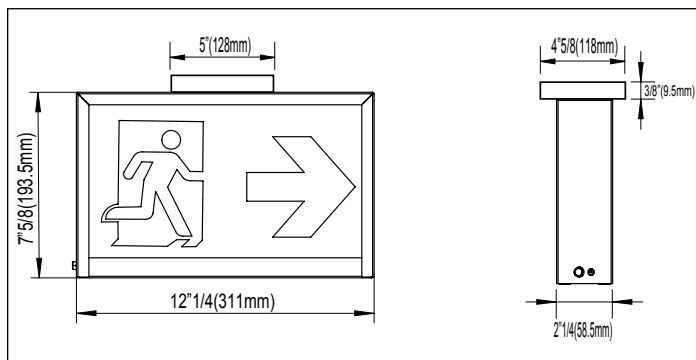

UNIVERSAL PICTOGRAMS

The standard OLR (Universal) includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
19000039	PZ-RM-ACDC-U-OLR-M	PREZZO STEEL RUNNING MAN UNIVERSAL FACE PICTOGRAMS UNIVERSAL MOUNTING WHITE FINISH 120-347VAC & 6VDC INPUT
19000038	PZ-RM-SP-U-OLR-M	PREZZO STEEL RUNNING MAN SELF-POWERED UNIVERSAL FACE PICTOGRAMS UNIVERSAL MOUNTING WHITE FINISH 120-347VAC INPUT